

TWS LED 1 replaces up to 70W HPS















Mounts to a recessed junction box - lower mounting height, 7-10 feet

- Impact resistant polycarbonate lens provides an even light distribution and protects electronics
- 100,000 hour LED life1
- Includes standard photo cell for dusk to dawn operation
- Cast aluminum back plate dissipates heat from LEDs to promote long life
- Highly efficient LEDs provide 54 lumens per watt
- ¹ LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.

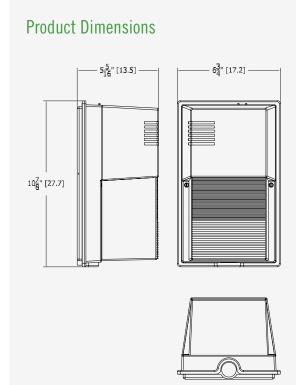

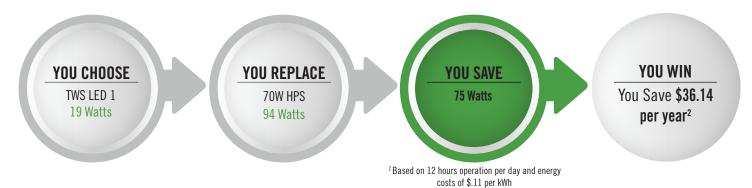

ORDERING INFORMATION Example: TWS LED 1 50K 120 PE Lead times will vary depending on options selected. Consult with your sales representative. TWS LED Voltage **Series** Performance Package Color Temperature (CCT) **Control Options** TWS LED LED Wall Pack **50K** 5000K³ 120 120 volts PΕ Photoelectric Cell, (blank) Dark Bronze 1 1017 lumens **Button Type**











3 Correlated Color Temperature (CCT) shown is nominal per ANSI C78,377-2008.