

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

## FEATURES & SPECIFICATIONS

**INTENDED USE** — LBL LED wraparound provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. The LED system delivers long life and excellent color to ensure a quality, low-maintenance lighting installation. Ideal for closets, storage rooms, hallways, and offices.

**CONSTRUCTION** — Metal parts are die formed from code-gauge steel. Prismatic diffuser is 100% acrylic with sonically welded luminous ends. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance.

Finish: Five-stage iron phosphate pretreatment assures superior paint adhesion and rust resistance.

Painted parts finished with high-gloss, high-reflectivity baked white polyester enamel (low VOC).

**OPTICS** — Curved prismatic diffuser with linear side prisms and highly transmissive overlay minimizes lamp image and provides high-angle brightness control. Luminous end plates soften appearance for improved aesthetics.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

LED drivers deliver dimming from 0-10V control signal.

**LISTINGS** — CSA certified to U.S. and Canadian standards. Damp listed.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Contractor Select

# LBLED Low-Profile Curved-Basket LED Wraparound

2' and 4'  
LED



### Specifications


Length: 24 (61.0)

48 (122.0)

Width: 10 (25.4)

Depth: 2-3/4 (7.0)


All dimensions are inches (centimeters) unless otherwise indicated.



### MOUNTING DATA

**Individual Installation** —  
Two single-stem hangers required.

**Row Installation** —  
One hanger per fixture plus one row required.

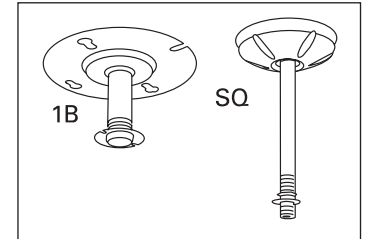

### ORDERING INFORMATION

See LBL Configurable specification sheet for additional lumen packages and control options.

| Catalog number          | UPC          | Description       | Lumens | Color temperature | Lens type             | Voltage | Wattage <sup>2</sup> | Pallet qty | Standard carton qty. |
|-------------------------|--------------|-------------------|--------|-------------------|-----------------------|---------|----------------------|------------|----------------------|
| LBL2 LP835 <sup>1</sup> | 190887819380 | 2' LED Wraparound | 2,014  | 3500 K            | Patterned #12 acrylic | 120-277 | 17                   | 112        | 1                    |
| LBL2 LP840 <sup>1</sup> | 190887819397 | 2' LED Wraparound | 2,046  | 4000 K            | Patterned #12 acrylic | 120-277 | 17                   | 112        | 1                    |
| LBL4 LP835 <sup>1</sup> | 190887819199 | 4' LED Wraparound | 4,188  | 3500 K            | Patterned #12 acrylic | 120-277 | 32                   | 56         | 1                    |
| LBL4 LP840 <sup>1</sup> | 190887819359 | 4' LED Wraparound | 4,253  | 4000 K            | Patterned #12 acrylic | 120-277 | 32                   | 56         | 1                    |
| LBL4 347 LP835          | 190887856682 | 4' LED Wraparound | 4,188  | 3500 K            | Patterned #12 acrylic | 347     | 32                   | 56         | 1                    |
| LBL4 347 LP840          | 190887856705 | 4' LED Wraparound | 4,253  | 4000 K            | Patterned #12 acrylic | 347     | 32                   | 56         | 1                    |

### Notes

- Product in stock.
- All values are design or typical values, measured under laboratory conditions at 25°C.

LBL-LED-WRAPAROUND