

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

### CONSTRUCTION

Features plated metal housing and matching finial in either brushed nickel or bronze finish with white acrylic diffuser.

### OPTICS

Produces 1,650 lumens at 50,000 hours of life.

### ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 23 watts, 72 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included.

### LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations.

### WARRANTY

5-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Note: Specifications subject to change without notice.

Decorative Indoor

# Denon LED Flush Mount




### Specifications

Depth: 2-7/8 (7.3)

Diameter: 14-5/8 (37.1)

All dimensions are inches (centimeters) unless otherwise indicated.



### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example:** FMDDHL 14 20830 BN

Series	CRI	Color temperature	Finish
<b>FMDDHL 14</b> LED flush mount 14" diameter	<b>208</b> >80	<b>40</b> 4000K 35 3500K <b>30</b> 3000K 27 2700K	<b>BN</b> Brushed nickel <b>BZA</b> Antique bronze

# LED Flush Mount Denon


## SUGGESTED DIMMERS

The FMDDHL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	SkyLark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120

## PHOTOMETRICS

FMDDHL 14 20830, 1649 delivered lumens, test no. LTL249969, tested in accordance to IESNA LM-79.

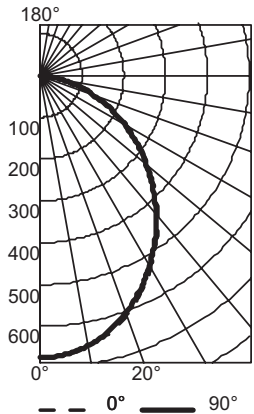

### CP Summary

	0°	90°
0°	673	673
5°	670	670
15°	637	633
25°	572	566
35°	486	479
45°	389	382
55°	290	282
65°	191	184
75°	97	91
85°	20	18
90°	1	1

### Coefficients of Utilization

pc	20%								
	80%			70%			50%		
pw	70%	50%	30%	50%	30%	10%	50%	30%	10%
0	119	119	119	116	116	116	111	111	111
1	109	105	101	103	99	95	98	95	92
2	100	92	85	90	84	79	86	81	77
3	91	81	73	80	72	66	77	70	65
4	84	72	64	71	63	57	68	61	56
5	77	65	56	64	55	49	61	54	49
6	71	58	50	58	49	43	56	48	43
7	66	53	45	52	44	38	51	43	38
8	62	49	40	48	40	34	47	39	34
9	58	45	37	44	36	31	43	36	31
10	54	41	34	41	33	28	40	33	28

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0° - 30°	502	30.4	30.4
0° - 40°	801	48.6	48.6
0° - 60°	1348	81.7	81.7
0° - 90°	1649	100.0	100.0
90° - 180°	0	0.0	0.0
0° - 180°	1649	100.0	100.0