

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

CONSTRUCTION

Features a white acrylic diffuser with polished chrome center ring and white metal housing.

OPTICS

Produces 1,580 lumens at 50,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 23 watts, 69 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included.

LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations.


WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Decorative Indoor


Kamino LED Flush Mount



Specifications

Depth: 3-1/2 (8.9)
Diameter: 13-7/8 (35.2)

All dimensions are inches (centimeters) unless otherwise indicated.



ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMKMRL 14 20830 KR

Series	CRI	Color temperature	Finish
FMKMRL 14 LED flush mount 14" diameter	208 >80	40 4000K 35 3500K 30 3000K 27 2700K	KR Polished chrome

LED Flush Mount Kamino


SUGGESTED DIMMERS

The FMKMRL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	SkyLark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120

PHOTOMETRICS

FMKMRL 14 20830, 1393 delivered lumens, test no. LTL24997, tested in accordance to IESNA LM-79.

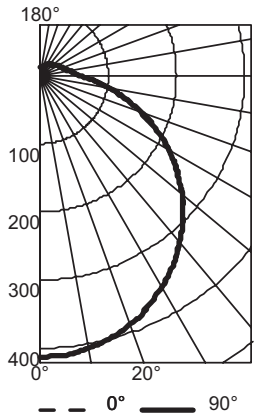

CP Summary

	0°	90°
0°	413	413
5°	411	412
15°	399	399
25°	375	374
35°	340	340
45°	298	296
55°	249	245
65°	193	189
75°	134	129
85°	81	77
90°	59	57

Coefficients of Utilization

pc	20%								
	80%			70%			50%		
pw	70%	50%	30%	50%	30%	10%	50%	30%	10%
0	116	116	116	112	112	112	104	104	104
1	104	98	93	95	90	86	88	85	81
2	94	85	77	82	75	69	76	70	66
3	85	74	65	71	63	57	66	60	54
4	78	65	56	63	54	48	59	51	46
5	71	58	48	56	47	41	52	45	39
6	66	52	43	50	42	35	47	40	34
7	61	47	38	45	37	31	43	35	30
8	56	43	34	41	33	27	39	32	27
9	53	39	31	38	30	25	36	29	24
10	49	36	28	35	27	22	33	26	21

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0° - 30°	324	20.4	20.4
0° - 40°	537	33.8	33.8
0° - 60°	984	62.0	62.0
0° - 90°	1393	87.8	87.8
90° - 120°	126	8.0	8.0
90° - 130°	151	9.5	9.5
90° - 150°	181	11.4	11.4
90° - 180°	194	12.2	12.2
0° - 180°	1587	100.0	100.0



An Acuity Brands Company

DECORATIVE INDOOR: One Lithonia Way, Conyers, GA 30012 Phone: 800-748-5070 Fax: 770-860-3903 www.lithonia.com

FMKMRL

© 2014 Acuity Brands Lighting, Inc. All rights reserved. Rev. 04/10/14