

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

CONSTRUCTION

Fan-shaped details on the low-profile, matte white acrylic diffuser create more subtle details than a light fixture with contrasting finishes on housings or trims.

OPTICS

Produces 1,200 lumens at 50,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 23 watts, 52 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included. Can be wall or ceiling mounted.

LISTINGS

cUL Listed to US and Canadian safety standards.

WARRANTY


5-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Decorative Indoor

Crenelle LED Flush Mount

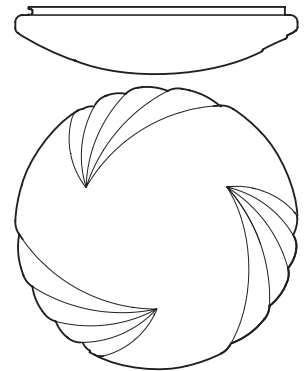

Specifications

Depth: 3-1/2 (8.9)

Diameter: 14 (35.6)

Weight: 1.5 lbs

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMCRL 14 20830

Series	CRI	Color temperature
FMCRL 14 LED flush mount 14" diameter	208 >80	40 4000K 35 3500K 30 3000K 27 2700K

LED Flush Mount Crenelle

SUGGESTED DIMMERS

The FMCRL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120