



ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

41260

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.2)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. **By measuring, determine correct tube length needed for proper hanging height.** Slide the electrical wires through the tube(M)/(L)/(K)/(J)/(I)/(G)/ring(H)/canopy(F) and assembled ceiling loop. The electrical wires and safety cable each through to the side holes of the assembled ceiling loop's coupling. Raise the tube(M) to the center pipe thread of the lamp body(N), raise the other tubes and assembled ceiling loop to the screw pipe nipple in order, then by turning it clockwise until tight.



HANGING THE FIXTURE (Fig.1 Please see the Page.2)

IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the junction box.

3. Provide a 1/4" IPS pipe thread with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the junction box as shown. **The junction box is not included.**
4. Assemble the hex nuts, lock washer, hex coupling(the end of assembled fixture body) to center 1/4"IPS support pipe and adjust overall length to allow the lock ring to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) hex nuts until tight, as shown.
5. **IMPORTANT: you must, run the safety cable through the two clamp bolts, then through the top of the junction box and secure to structural member. NOW, fasten the end of safety cable through the two clamp bolts(see fig.1), lock them securely with the four small hex nuts until tight.**
6. Connect the electrical wires as Shown in **Fig.3**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your Junction Box has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the assembled ceiling loop's coupling with the screw provided. After wires are connected, tuck them carefully inside the Junction Box. Slide the canopy(F) onto the Junction box, lock it securely with the ring(H) until tight.
7. Install the light bulbs(Not included) in accordance with the fixture specifications.
NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
8. Raise the end screw of the crystal stick(A) insert to the top screw hole of the lamp body(N), by turn it clockwise until tight. Raise the end screw of the crystal stick(B) insert to the bottom adjacent screw hole of the crystal stick(A), by turn it clockwise until tight. Assembled using the same method the others crystal sticks(order: A, B, A, B, A.....).

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.2

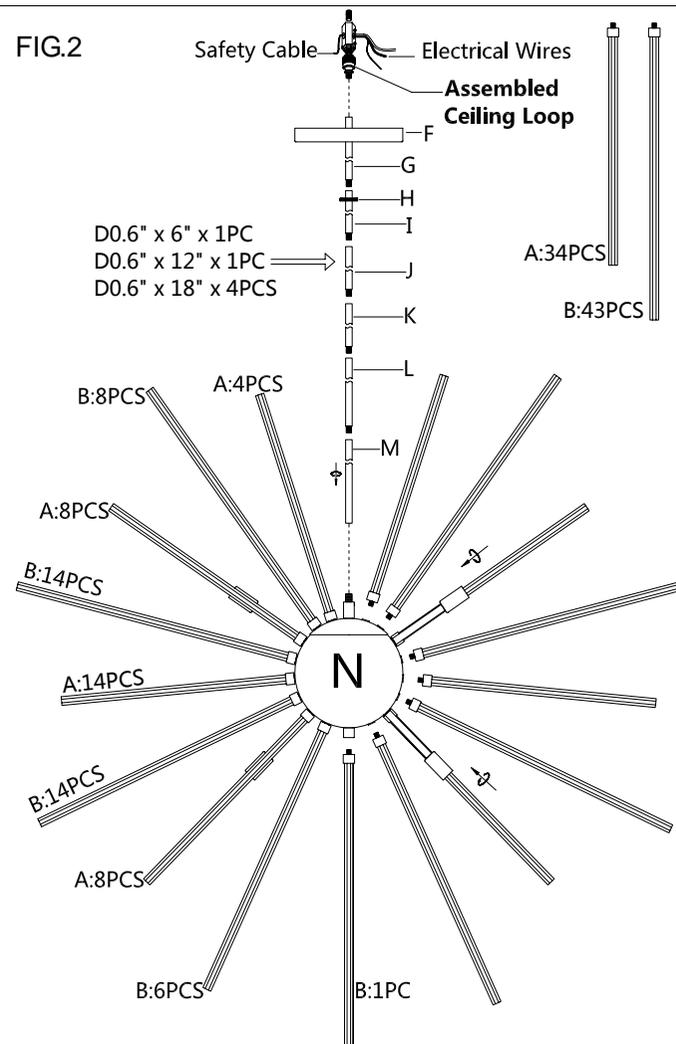

Canopy




Clamp Bolt



Hex Coupling

FIG.3

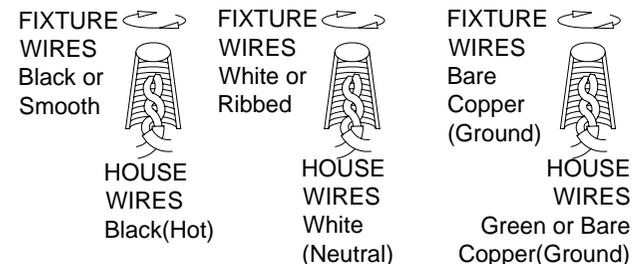

Thank you for purchasing a **LIVEX** product.

Need assistance with parts or assembly? Please call customer service at: **800-761-8056**

Or visit us online at: WWW.LIVEXLIGHTING.COM

ASSEMBLING & INSTALLATION INSTRUCTIONS FOR HEAVY MOUNTING FIXTURE

Fig.1

