

# ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 6290

## For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

### MOUNTING THE FIXTURE

#### Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Attach the single bar to the junction box using two junction box screws. The side of the single bar marked "GND" must face to out.
4. The end of pipe nipple screw into single bar, Place lock hex nut over end of pipe protruding from single bar and by turning it clockwise until tight.
5. Follow wiring instructions carefully (see fig.2)
6. Raise the lower arm (G), plastic shim (I) and glass (F) to bottom of the fixture body (C), aligning the holes with pipe nipple and screw it with small ball nuts (D).
7. Attach the fixture body (C) to end of the pipe nipple then tighten it with the big ball nut (H).
8. Put the socket sleeve (E) onto the socket.
9. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
10. Put the glass (B) onto the fixture body (C) then tighten it with the plastic shim and screws (A).

#### Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the single bar .
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

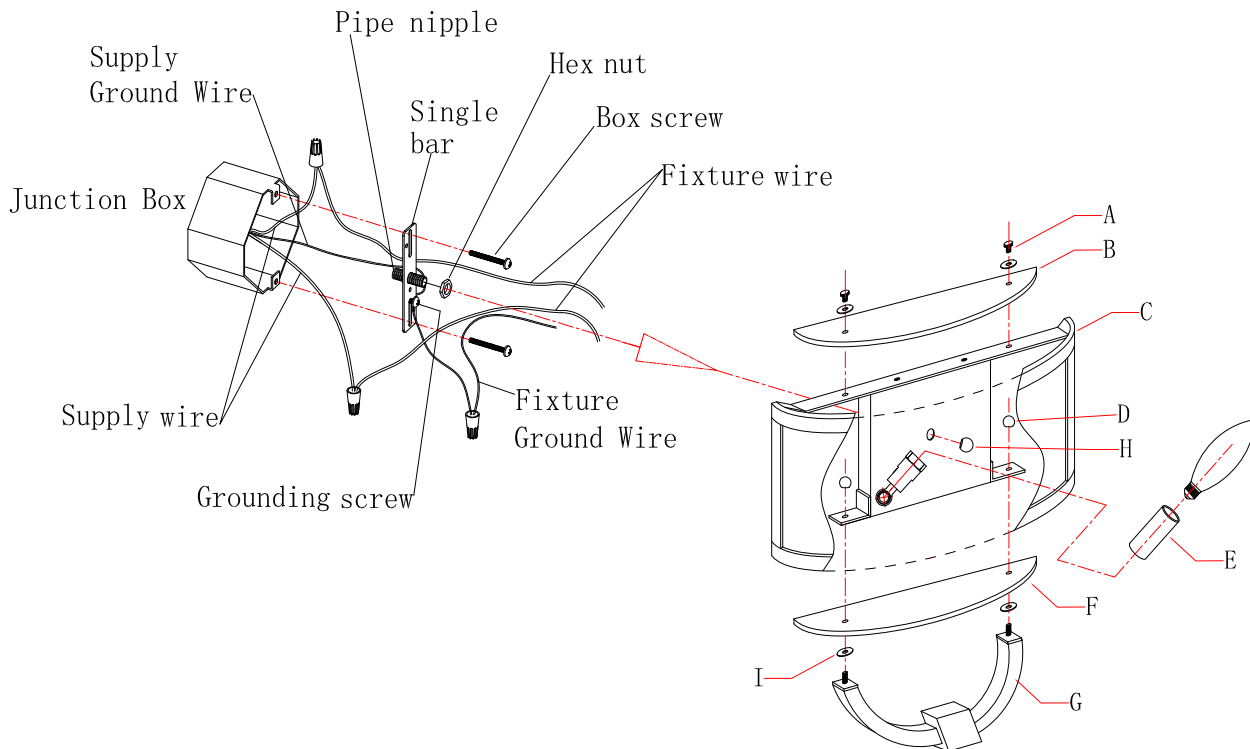


Fig.2

