



FEATURES

Public, Private & Remote Allocation System (RAS) mode
 Key override
 Up to 80,000 cycles per pair of AA batteries
 Batteries included
 Battery condition indicator
 Audible keypad (can be turned on/off)
 8 digit master code
 6 digit sub-master code
 4 digit user codes
 6 digit technician code
 Auto unlock mode (can be turned on/off)

OPTIONS

Finishes: Silver (S), Black (B), Custom (C)*
Keypad Direction: Vertical (V), Right (R), Left (L)
 Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:

Length: 143.5mm (5.65in)
 Width: 41mm (1.61in)
 Depth: 11.5mm (.45in)

Internal Dimensions:

Length: 142mm (5.6in)
 Width: 42.6mm (1.68in)
 Depth: 37.5mm (1.48in)

Mounting Hole Shape: 3 point mounting (see technical drawing)

Spindle Length: 24mm standard, 20mm by special order*

Power: 2 x AA Battery (Alkaline)

Low Battery: LED lights with battery condition indicator


Material: Zinc diecast

Finish: Powder coated

For Internal Use

ORDERING INFORMATION

Order # for EC-784 shown above is EC-784BV

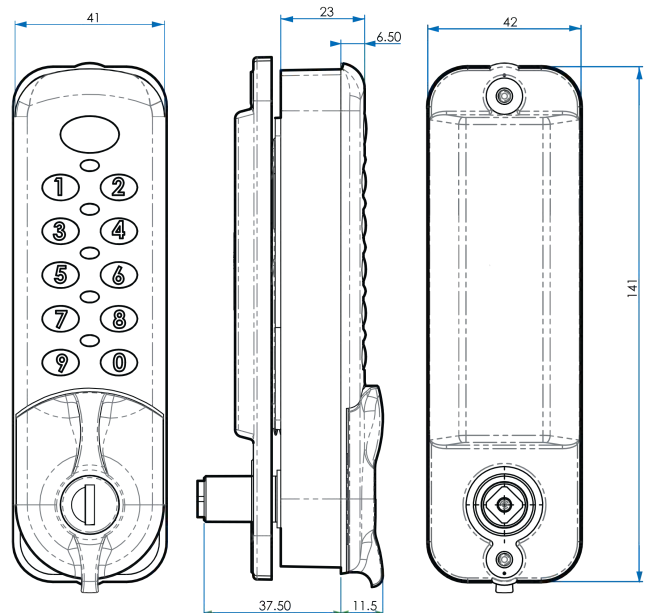

PART #	FINISH	KEYPAD DIRECTION	REMOTE ALLOCATION SYSTEM
EC-784	(S) SILVER (B) BLACK (C) CUSTOM*	(V) VERTICAL (R) RIGHT (L) LEFT	(RAS)

*Contact LockeyUSA for minimum order quantities and lead times for special/custom orders.