



## FEATURES

**RFID:** Can be paired with existing MIFARE/NFC 13.56MHz systems or used separately  
 Flush fit  
 Public or private user modes  
 Key override  
 Up to 80,000 cycles per pair of AA batteries  
 Batteries included  
 Battery condition indicator  
 Audible actuation

## PROGRAMMING OPTIONS

Change master card, add user card, delete all user cards, delete single user card (with & without user card), set private mode & public mode, set audio, auto unlock, set read speed mode.

## ORDERING OPTIONS

**Finishes:** Silver (S), Black (B), Custom (C)\*

## DIMENSIONS & SPECIFICATIONS

### External Dimensions:

Length: 143.5mm (5.65in)  
 Width: 41mm (1.61in)  
 Depth: 13.5mm (.53in)

### Internal Dimensions:

Length: 141.6mm (5.57in)  
 Width: 42.6mm (1.68in)  
 Depth: 37.5mm (1.48in)

**Mounting Hole Shape:** 3 point mounting

**Spindle Length:** 24mm standard, 20mm by special order\*

**Power:** 2 x AA Battery (Alkaline)

**Low Battery:** LED indicator lights with battery condition indicator


**Material:** Zinc diecast

**Finish:** Powder coated

For Internal Use

## ORDERING INFORMATION

Order # for EC-785 shown above is EC-785S

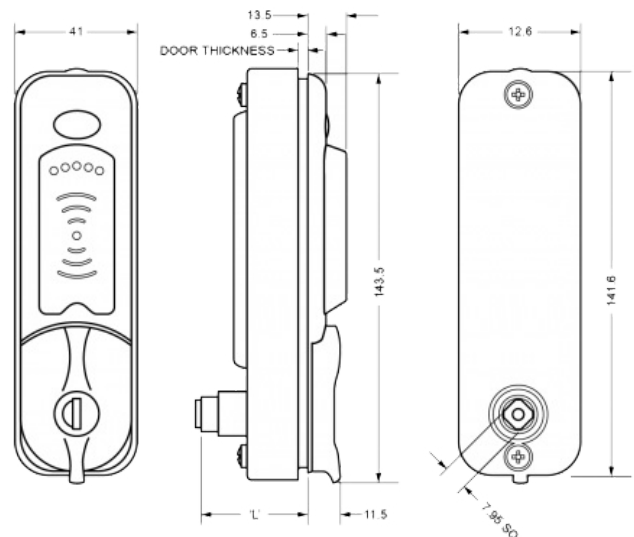

PART #	FINISH
EC-785	(S) SILVER (B) BLACK (C) CUSTOM*

\*Contact LockeyUSA for minimum order quantities and lead times for special/custom orders.