



24-Inch Thermo Griddle ♦ MCCTG24A



Standard Features

- ♦ 68,000/60,000 BTU output
- ♦ 24.0" W x 24.0" D x 1" thick griddle plate
- ♦ Stainless Steel U-Shaped Burner
- ♦ Bullnose edge
- ♦ Easy to clean grease trap
- ♦ Heavy Duty Chrome Plated comfort grip knobs
- ♦ Embedded temperature probe for more accurate cooking and better performance
- ♦ Propane gas conversion kit included

Exterior Features

- ♦ Stainless steel body and legs
- ♦ 6" Adjustable legs

Certified Safety Standard

- ♦ ETL Certified
- ♦ ETL Sanitation Listed




Warranty Information

- ♦ One year on-site Parts and Labor







24-Inch Thermo Griddle ♦ MCCTG24A

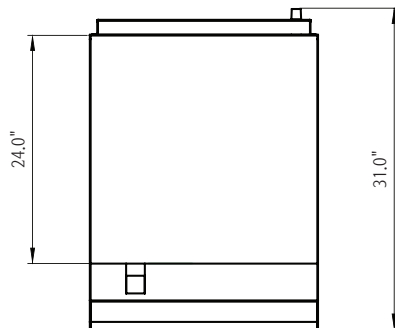

Top View



Front View

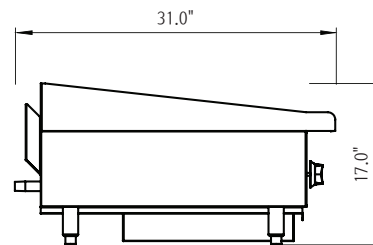

Side View

Model		MCCTG24A	Propane Conversion
Gas Output	BTU	68,000	60,000
	(kWh)	19.9	17.6
Number of Burners		2	2
Shipping Weight (Lbs)		264.6	264.6
Manifold Pressure	Natural Gas	4" W.C.	-
	Propane Gas	-	10" W.C.
Manifold Size		3/4"	3/4"
Burner Orifice Size		35/2.80mm	52/1.60mm
Cooking Area (Sq. In.)		571.2	571.2
Dimensions (W x D x H)		24.0" x 31.0" x 17.0"	24.0" x 31.0" x 17.0"
Crated Dimensions (W x D x H)		37.0" x 29.1" x 20.5"	37.0" x 29.1" x 20.5"

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combustible floors.

Clearance requirements	Combustible Surfaces	Non-combustible Surfaces
Rear	6" ~ 8"	0"
Left	6" ~ 8"	0"
Right	6" ~ 8"	0"

Options and accessories