Floor Mount, Rear Outlet, Elongated Front, SmartHeight™, Flush Valve Toilet



Features _____

- Designed for commercial and industrial applications
- 1.28* or 1.6 gpf water consumption (*when using the proper 1.28 flushometer)
- Elongated SmartHeight™ (16-1/2" high bowl) chair height
- ADA Compliant
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White



Components _____

Model # Description Codes/Standards

1313 Elongated front flush valve toilet bowl. Less flush valve and supply.












Specifications

Model #	Description	Codes/Standards	
1313	Floor mount, elongated front, flush valve 1.28* or 1.6 Gpf toilet (*when using the proper 1.28 flushometer)	ADA HET	

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	1-7/8"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-3/4"
Water Usage	1.28* or 1.6 gpf / 4.86 or 6.0 lpf	Rough-in	Rear Outlet
Water Surface Area	10" X 12"	Shipping Weight	Model 1313 - 61 lbs. (28 kg)
MaP Rating	800 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Five Year Limited

Technical Information

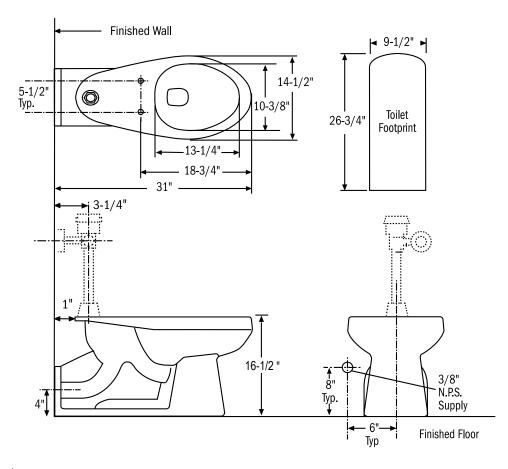

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

