

DARE TO BE BOLD

SERLIANA™

GLAZED PORCELAIN WALL

MARAZZI 
DARE TO BE BOLD™



SERLIANA™



BLUE

Serliana™ transforms spaces into old world inspired designs invigorating walls with decorative porcelain mosaics. A Moroccan inspired arabesque motif brings pattern to life through intricate visual details. An assortment of six natural, muted colors are available for a spirited design.

TAUPE



BLUE



TAUPE



SERLIANA™

GLAZED PORCELAIN

MOROCCAN MOSAIC 14 x 12 SHEET



SE25 White




SE26 Off White




SE27 Taupe



SE28 Dark Tan

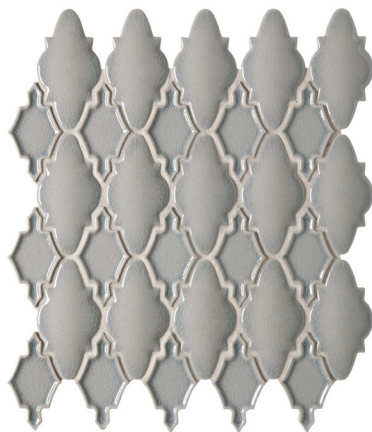

SE30 Blue

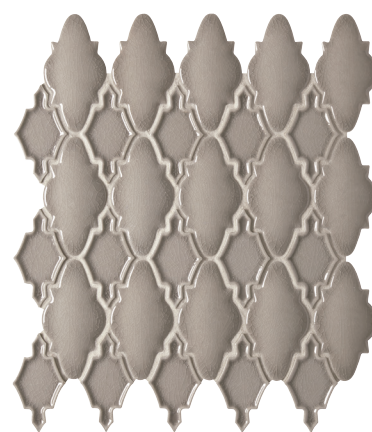

SE29 Gray


USAGE

Floors	Walls	Countertops
	W	


SERLIANA™

GLAZED PORCELAIN

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton	
	Moroccan Mosaic 14 X 12 Sheet (Mesh-Mounted)	(14-3/8" x 12-7/16") (36.49 cm x 31.57 cm)	7/16"	9.7	10

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Medium Variation

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit marazzitile.com/DCOF.

PERFORMANCE CHARACTERISTICS

	ASTM#	Mosaic Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmations should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazzitile.com/Factors

Use of a White latex modified thin-set is recommended for installation.



Wall Tile



All or select items within this series meet the requirements for these qualifications. For more information visit marazzitile.com.



7834 C.F. Hawn Freeway
Dallas, Texas 75217

www.marazzitile.com
contact@marazzitile.com

©2018 Marazzi | 04.18 | MZBRO122 Serliana™ Brochure

COVER FEATURES SERLIANA™ IN TAUPE

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with Marazzi Customer Service for details.