

ZELLIGE™  
GLAZED CERAMIC WALL

MARAZZI®  
DARE TO BE BOLD™

WALL

WALL





# ZELLIGE™

Inspired by ancient Moroccan tiles, Zellige blends North African tradition with industrial ceramics. The undulated surface and variation in color tones accentuates the natural imperfections and hand-crafted look of Zellige. Its glossy finish and visible variation creates a blend effect in which the color vibrates strongly. Offered in an array of 12 beautiful shades, these 4x4 tiles have the power to transform any space.



COVER PHOTO: BOSCO  
ABOVE PHOTO: CHINA

WALL



USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

MATERIAL



PRICING



SPECIAL FEATURES

WALL

## WALL TILE




ZL11 Gesso



ZL07 Lana



ZL09 Cammello

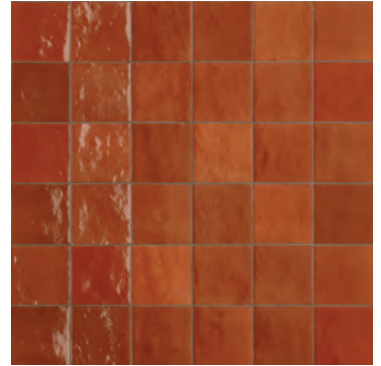

ZL10 Carallo



ZL08 Argilla



ZL02 Salvia




ZL01 Turchese




ZL04 Cielo




ZL03 Bosco

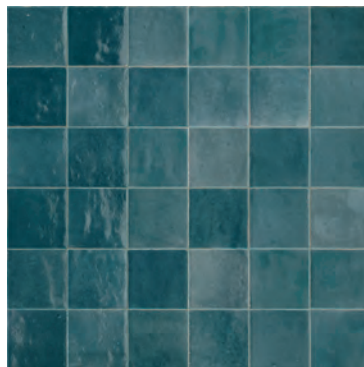

ZL05 Petrollo

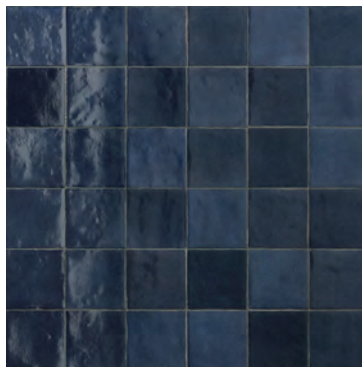

ZL06 China

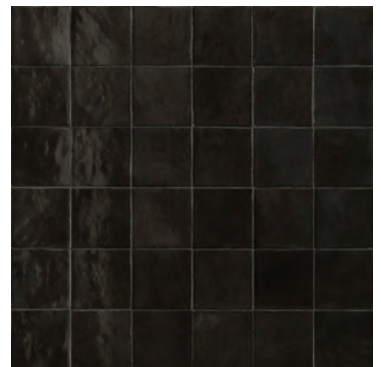

ZL12 Carbone



STAINPROOF



DENTPROOF



FIRE RESISTANT



SIMPLICLEAN™

VISIT [MARAZZITILE.COM/WHYTILE](http://MARAZZITILE.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

USAGE



MATERIAL




PRICING




SPECIAL FEATURES

WALL

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 4 Wall Tile	3-15/16" x 3-15/16" (10.00 cm x 10.00 cm)	3/8"	5.81	54

## APPLICATIONS




	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior wall applications in non-freezing climates only, when proper installation methods are followed.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Medium Variation (ZL11 & ZL12)
	 High Variation (ZL10, ZL02, ZL01, ZL04, ZL03, ZL05 & ZL06)
	 Random Variation (ZL07, ZL09 & ZL08)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors).

## FEATURES



PRE-CONSUMER  
RECYCLED MATERIALS



ZEROTOX  
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit [marazzitile.com](http://marazzitile.com).