




PRODUCT NAME: Arbor 2-Light  
ITEM NUMBER: 53504

Please consult your electrician for hanging fixture and wiring.

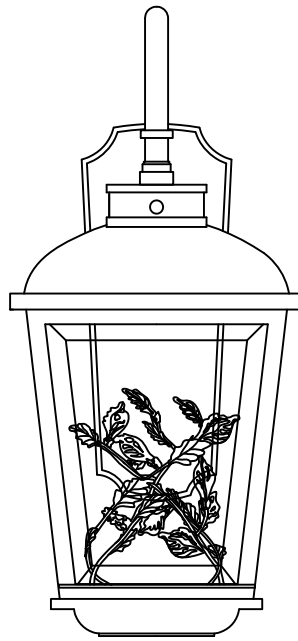

To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant. Leave a small gap at the bottom to allow moisture to exit.

"This fixture is designed to dim with an Electronic Low Voltage dimmer. Dimming levels will vary by dimmer.

Below is a List of Recommended Dimmers:

\* Lutron MACL-153M

\* Leviton IPL06-10Z

Due to inrush current, wattage should not exceed 150 Watts of product for a 600 Watt dimmer."

**17W AC LED**


PRODUCTS ARE NOT INENDED  
FOR COMMERCIAL USE.

MADE IN CHINA  
Page 1 of (2)



PRODUCT NAME: Arbor 2-Light  
ITEM NUMBER: 53504

**CAUTION:** Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.  
Carefully unpack and identify all parts before assembly

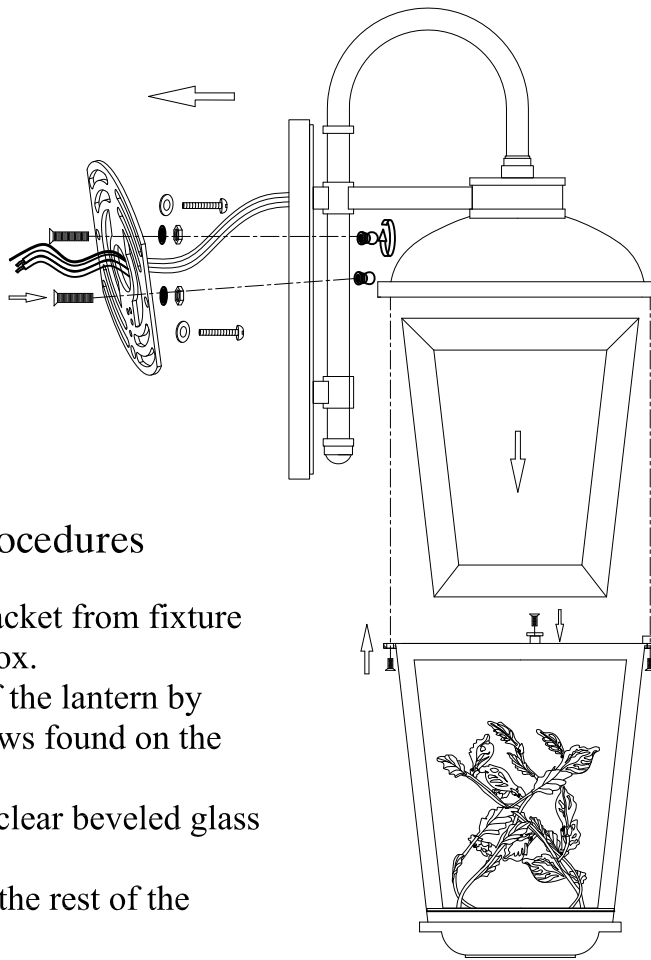

### Installation Procedures

1. Remove mounting bracket from fixture and install to electrical box.
2. Release the bottom of the lantern by unscrewing the four screws found on the hood's corners.
3. Install three panes of clear beveled glass to cage of lantern.
4. Re-attach the cage to the rest of the lantern.
5. Wire fixture to wires in outlet box.  
Copper wire is for Ground.
6. Attach fixture to mounting bracket and tighten screws on the side so fixture meets wall.  
(For outdoor use, caulk fixture with silicone sealant)