
ASSEMBLY INSTRUCTIONS FOR #19029

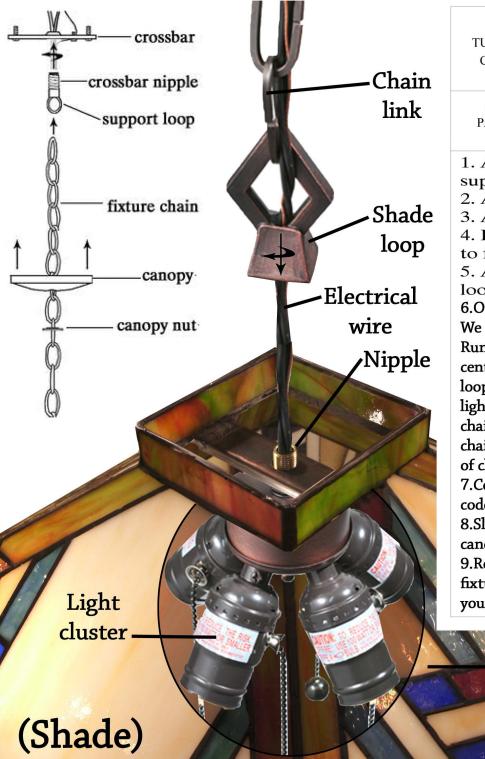

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1. Attach crossbar nipple with support loop to crossbar.
- 2. Attach crossbar to j box.
- 3. Attach fixture chain to hub loop.
- 4. Place canopy nut than canopy on to fixture chain as shown.
- 5. Attach fixture chain to support loop.
- 6.Open the chain link above the shade loop. We do this so that your wire does not twist. Run your electrical wire through the hole in center of shade, & then through the shade loop. Screw the shade loop down onto the light cluster's nipple. Determine length of chain, add only the chain that you need. Close chain link. Run electrical wire up the length of chain, through the canopy & canopy loop. 7.Connect all electrical wires as per your local codes.
- 8.Slide canopy up the length of chain & screw canopy nut onto support loop.
- 9.Remove metal balls from sockets, bulb your fixture (bulbs not included), power on, enjoy your new fixture!

NOT THE SHADE
 SHIPPED WITH THIS
 UNIT, BUT SIMILAR
 SHAPE & DESIGN



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com