


ASSEMBLY INSTRUCTIONS FOR # 29268

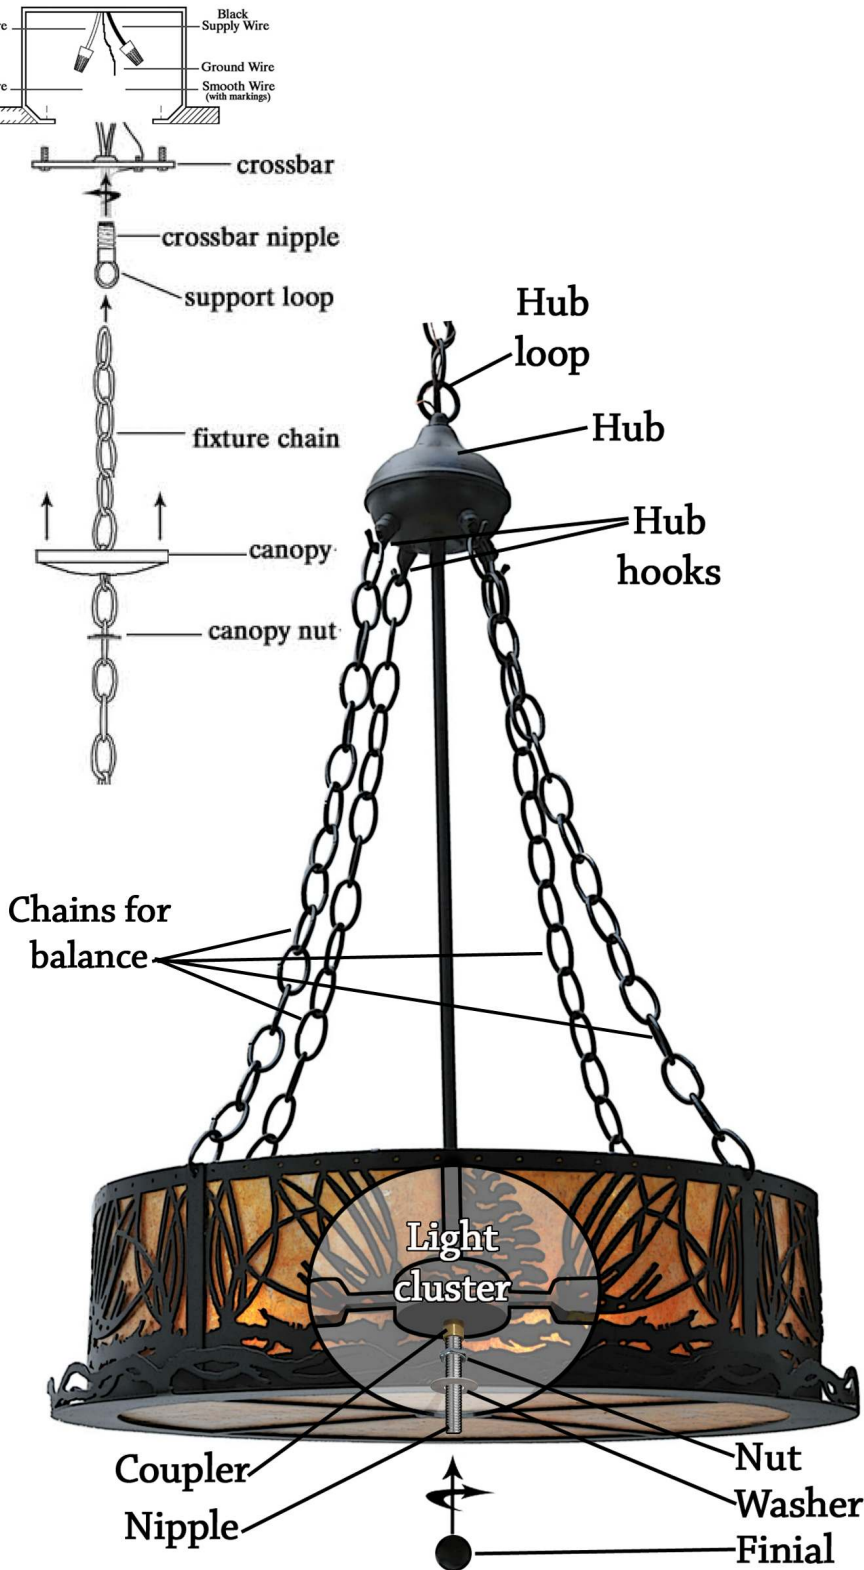

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Attach crossbar nipple with support loop to crossbar.
2. Attach crossbar to j box.
3. Attach fixture chain to hub loop.
4. Place canopy nut then canopy on to fixture chain as shown.
5. Attach fixture chain to support loop.
6. Wire as per local electrical code.
7. Slide canopy up to ceiling, screw canopy nut onto crossbar nipple and tighten to canopy.
8. Screw nipple into coupler located under light cluster. Screw nut onto nipple, & slide washer up nipple.
9. Bring shade to hardware and connect chains from shade to hub hooks.
10. Slide nipple into center of shade with the washer still on it. Screw finial onto nipple under the shade. Screw nut down to meet the shade (tight).
11. Bulb your fixture, (bulbs provided by others). Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com