




"A Commitment to Excellence
in Lighting and Service"

0244-03/08/06

#31931

1. Turn off power to J-Box.
2. Place fixture with threaded rod through and into center of shade, place washer onto threaded rod and screw round finial onto threaded rod.
3. Attach chains(4) from shade to loops located on center fixture rod.
4. Place Teepee shade over center fixture rod and seat to bottom shade(make sure fixture wire is thread through fixture loop, support chain, canopy & crossbar).
5. Attach complete fixture to J-Box and wire as per local electrical code.
6. Turn on power to J-Box.

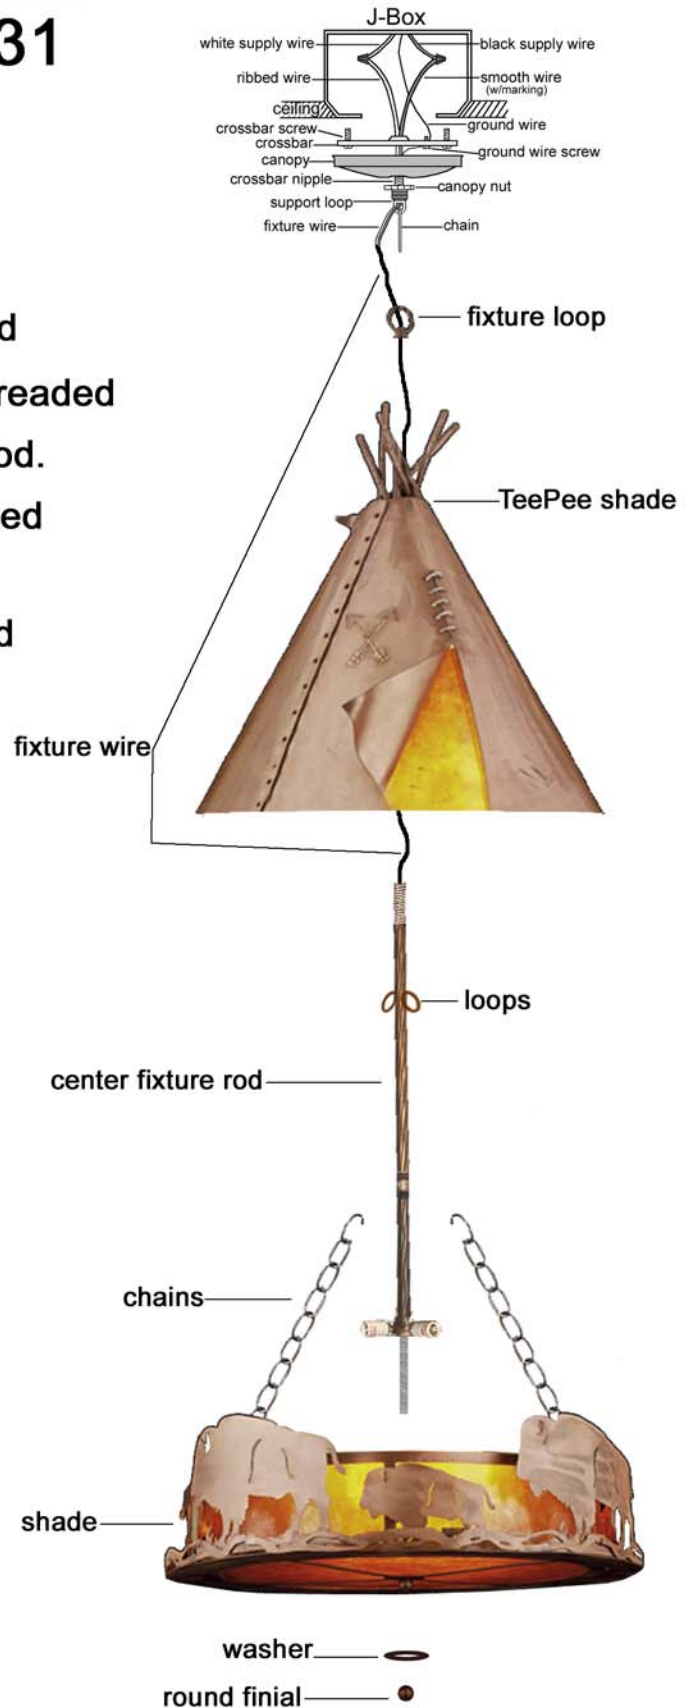

Any Questions? Call Customer Service at 1-800-222-4009. Mon - Fri. 8:00 am - 6:00 pm