


# ASSEMBLY INSTRUCTIONS FOR #149397

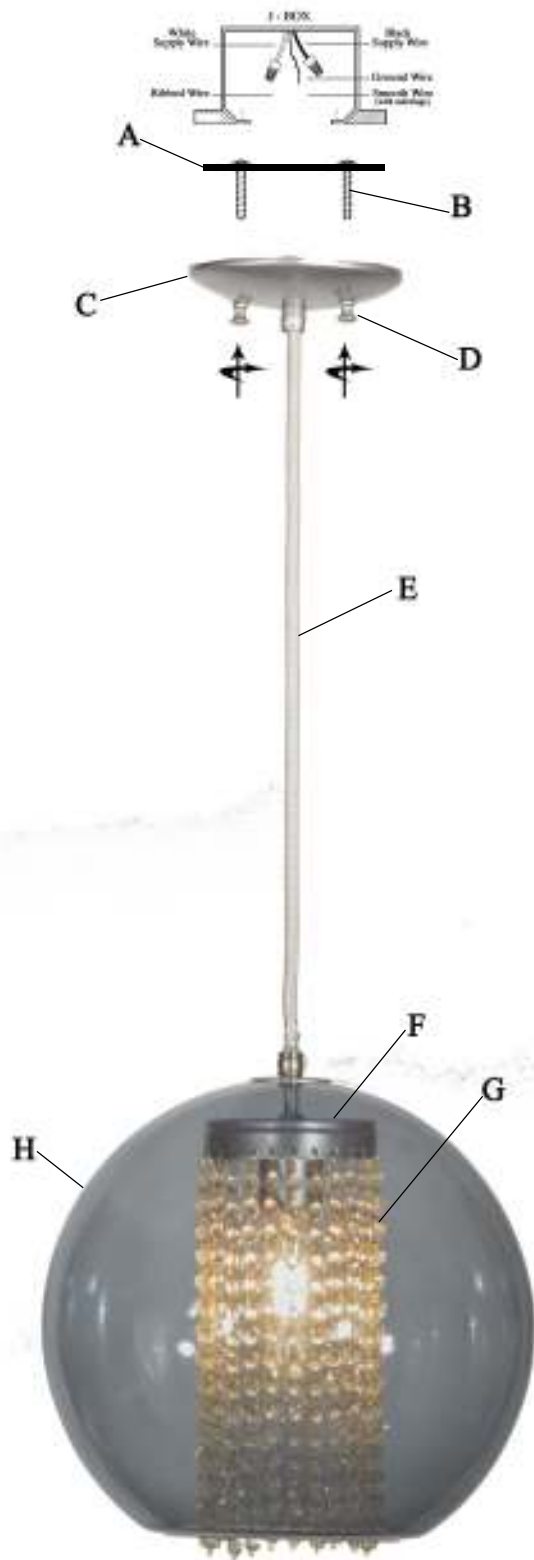

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

Do NOT remove the protective bubble wrap from glass globe until after installed.

- 1.) Attach cross bar(A) to j-box using customer provided screws.
- 2.) Determine desired overall height of the fixture.
- 3.) Insert electrical cord(E) through canopy(C) and crimp metal strain relief to cord above canopy(C) at desired height.
- 4.) Wire as per local electrical codes.
- 5.) Place canopy(C) onto cross bar screws(B) and secure with nuts (D).
- 6.) Remove protective bubble wrap from glass globe(H).
- 7.) Hang crystal strands(G) on crystal ring(F).



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)