


ASSEMBLY INSTRUCTIONS FOR 106637

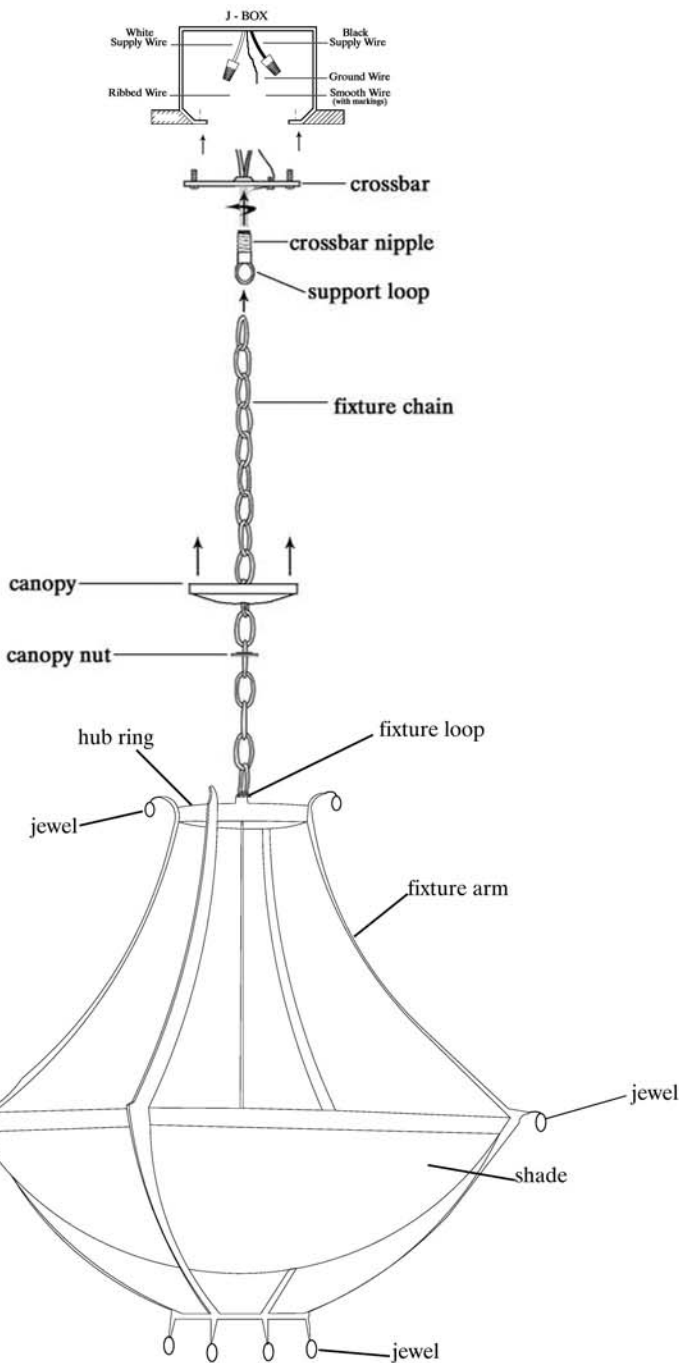

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Screw crossbar to J-box.
2. Thread electrical cords through fixture loop, canopy, support loop, canopy nut, and crossbar.
3. Wire as per local electrical code.
5. Slide canopy up to ceiling.
6. Slide canopy nut up and screw onto support loop, tighten to canopy.
7. Bolt fixture arms to hub ring. (Jewels go on top)
8. Place shade into shade ring.
9. Attach shade ring with shade to fixture arms.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com