

ASSEMBLY INSTRUCTIONS FOR #107560 (50286-63)

FIG.A


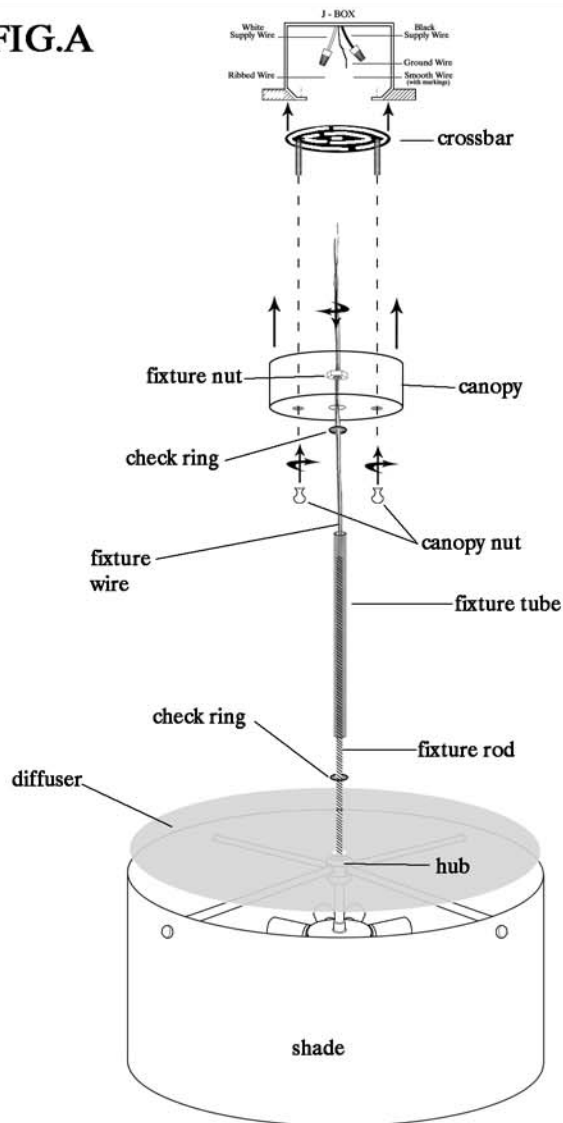


FIG.B

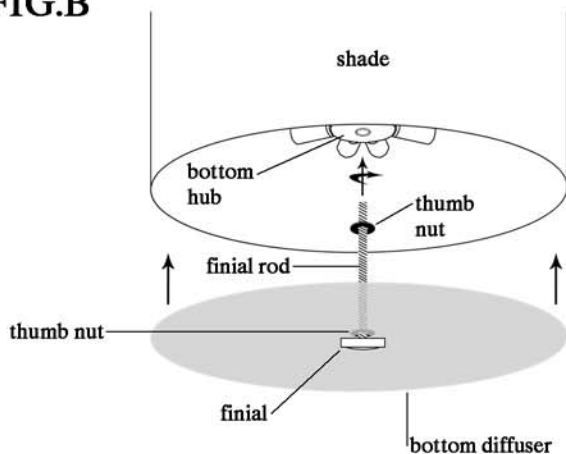

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

*** THIS IS A 2 PERSON JOB**

1. Place fixture wire through fixture rod, screw fixture rod into top of hub.FIG.A
2. Place diffuser over fixture rod and seat down onto hub. FIG.A
3. Place check ring (face up) onto fixture rod, place fixture tube onto fixture rod, place check ring (face down) onto fixture rod, place canopy onto fixture rod, screw fixture nut onto fixture rod and tighten to canopy. FIG.A
4. Screw crossbar to jbox.
5. Place fixture up to crossbar and wire as per local electrical code.
6. Place canopy/fixture onto crossbar screws and attach with canopy nuts. FIG.A
7. Place light bulbs into sockets.
8. Place bottom diffuser onto finial rod, screw thumb nut onto finial rod and tighten to diffuser.FIG.B
9. Screw thumb nut 1/2" to 3/4" onto finial rod, screw finial/diffuser into bottom of hub, tighten to thumb nut.FIG.B



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com