

## PFD 104 SCVi (120/208-240V) 24" Fully Integrated Dishwasher K2o

### Features:

- Integrated Dishwasher for offices, showrooms, legal practices, kitchen studios, and private homes
- Ideal for up to 5 wash cycles per day
- Tested for 12,500 program cycles
- MaxiComfort Baskets with 3D MultiFlex Drawer
- With Baskets as standard
- BrilliantLight interior lighting
- Integrated water softener
- Perfect integration into handleless kitchens
- Knock2open
- AutoOpen and AutoClose
- WiFiConn@ct as standard


### MATERIAL #

11605520




SPECIFICATIONS	
Overall Unit Dimensions	23.5" (598 mm) W x 33.3" - 35.8" (845 -910 mm) H x 22.4" (570 mm) D [Depth does not include door panel]
<b>Niche</b>	
Minimum Cabinet Niche Opening	23 <sup>5</sup> / <sub>8</sub> " (600 mm) W x 33 <sup>3</sup> / <sub>4</sub> " (845 mm) H x 22 <sup>7</sup> / <sub>16</sub> " (570 mm) D
<b>Plumbing</b>	
Water Supply Requirements	<ul style="list-style-type: none"> <li>• Cold or Hot (max 140°F/60°C) water connection</li> <li>• Male 3/4" GHT</li> <li>• Water pressure range 0.73 psi (0.05 bar) and 145 psi (10 bar)</li> </ul>
Water Connection Line (Supplied)	Length: 4.9 ft (1.5 m) Female 3/4" GHT
Drain Hose (Supplied)	Length: 4.9 ft (1.5 m) 7/8" (22 mm) internal diameter
<b>Electrical</b>	
Electrical Requirements	120/208-240V, 60Hz, 2x30Amps
Power Cord (Convertible to hardwire)	NEMA 14-30 plug, 5' 7" (1.7 m)
<b>Sound</b>	
Sound level	45 dB(A)
<b>Shipping</b>	
Shipping Weight	112 lbs (51 kg)
Shipping Dimensions	26.4" (670 mm) W x 38.2" (970 mm) H x 26.4" (670 mm) D


### PRODUCT DIMENSIONS

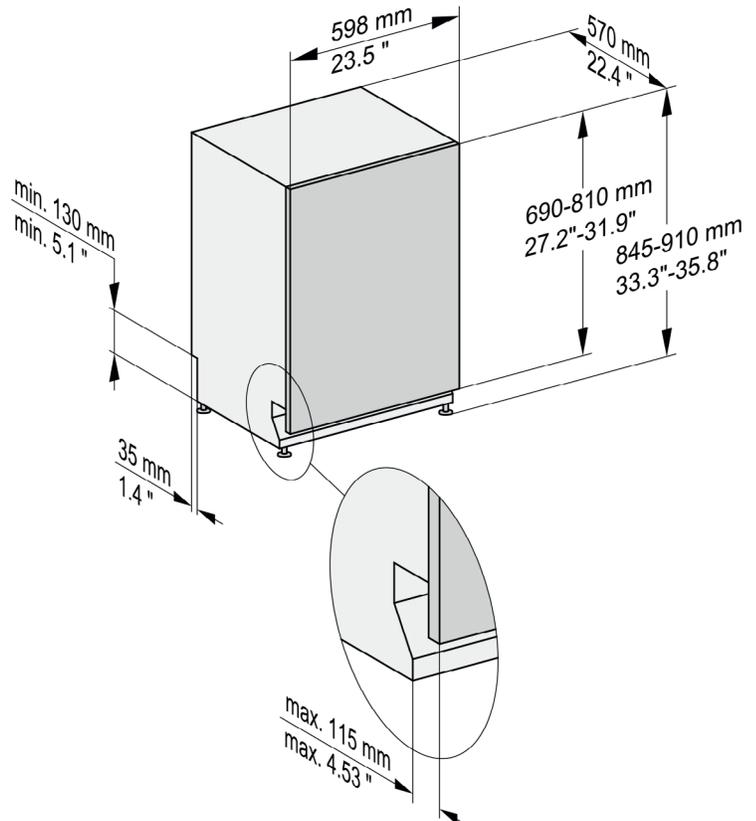

## CUTOUT DIMENSIONS

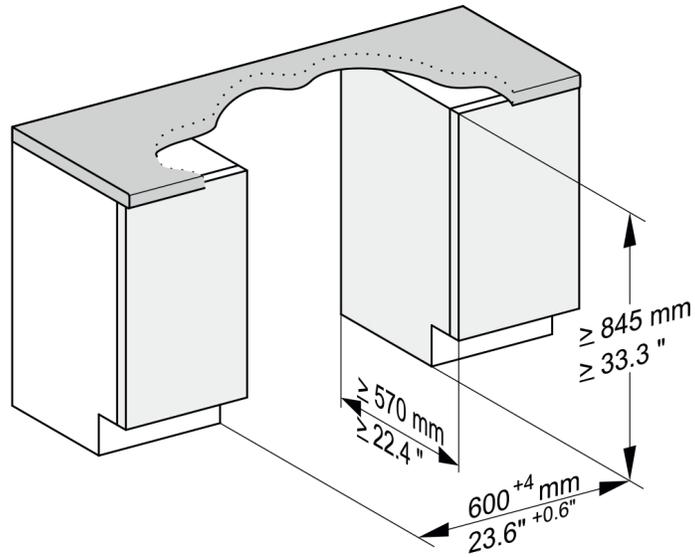

## CUSTOM PANEL

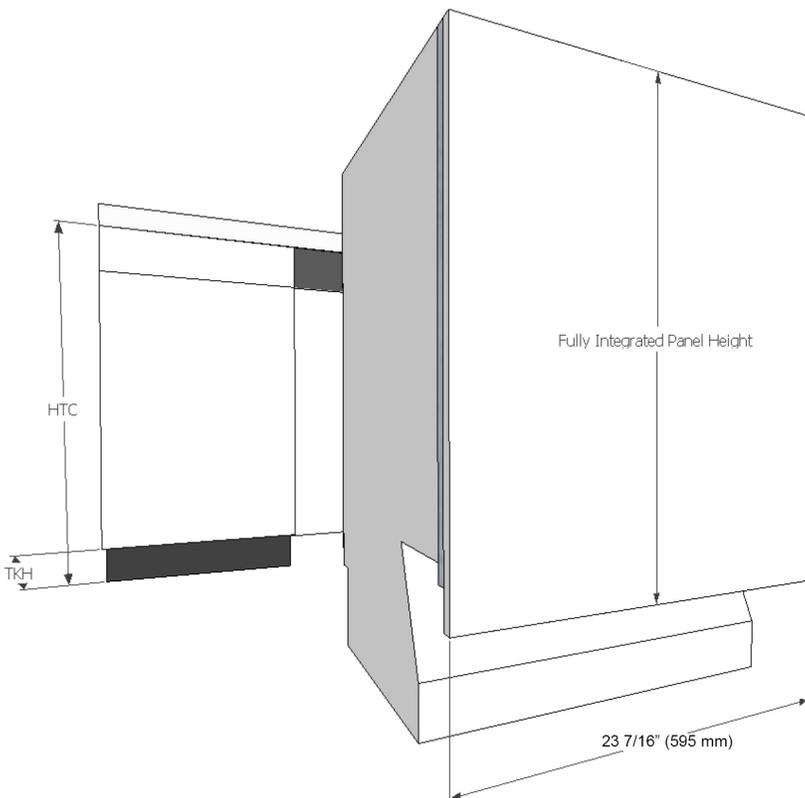

**Panel Height = HTC - TKH**

**HTC** = Height to the underside of Countertop

**TKH** = Toe Kick Height

**Note:** Control panel is along the top edge of the unit.

### Front Panel Dimensions

Length: 27.2" (690 mm) - 31.9" (810 mm)

Thickness: 0.63" (16 mm) - 0.79" (20 mm)

Width: 23.4" (595 mm) in all cases

Weight: 11 lbs (5 kg) - 26.5 lbs (12 kg)