

DAS 2920

Built-in ventilation hood
with EasySwitch controls for convenient operation




- Classic design – stainless-steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495857 / Material number: 11878500 /
Old Material Number: 28S2920SUSA

Design	
Built-in ventilation hood	•
Appliance color	Stainless steel
Operating modes	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
OdorFree charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
User convenience	
Electronic controls	•
EasySwitch	•
Booster levels	1
Cleaning convenience	
Easy-to-clean CleanCover hood liner	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	1
Lighting	
LED	•
Number x W	1 x 3,0 W
Light intensity in lx	300 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Exhaust air	
Maximum air throughput in cfm according to HVI	427
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 3/8 (896)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum distance above electric cooktops in in. (mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Total connected load in kW	0.35
Frequency in Hz	60
Installation note	
Vent connection at top	•
Standard accessories	
Non-return flap	•

DAS 2920 Built-in ventilation hood with EasySwitch controls for convenient operation

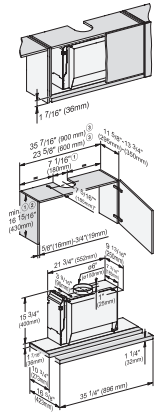

DAS2920, DAS4920, drawing – US

- 1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts.
 - 2) Exhaust air, recirculation with DUU 150 conversion kit.
- Installation is also possible in a 600 mm wide cabinet. , ,
*In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.