

DA 6698 W Puristic Edition 6000

Wall ventilation hood

with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Energy-efficient and quiet
- Energy-efficient and quiet

EAN: 4002516024620 / Material number: 10877010 / Old Material Number: 28669850USA

<b>Construction type</b>	
Wall ventilation hood	•
<b>Operating modes</b>	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF 12-P
<b>Design</b>	
Color	Stainless steel
Variable height available as special order	•
<b>Control panel</b>	
Miele@home	•
Electronic controls	•
Power levels (number excl. Intensive)	3
Touch controls	•
Programmable Intensive switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Acoustic package	•
<b>Cleaning convenience</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless-steel grease filters	3
<b>Lighting</b>	
LED	•
Number x W	3 x 3 W
Light intensity in lx	670 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Extraction</b>	
Air throughput	Values upon request
<b>Safety</b>	
Safety shut-off	•
Single-ply safety glass (ESG)	•
<b>Technical data</b>	
Overall hood height for vented mode and external in inches (mm)	28 (710)–40 5/8 (1030)
Overall hood height for recirculation and external in inches (mm)	33 1/8 (840)–45 3/4 (1160)
Canopy width in in.(mm)	35 3/8 (898)
Overall min. height for vented and external in in. (mm)	28 (710)
Overall max. height for vented and external in in. (mm)	40 5/8 (1030)
Canopy height in in.(mm)	3 3/8 (85)
Overall min. height for recirculation in in. (mm)	33 1/8 (840)
Canopy depth in in.(mm)	19 3/4 (500)
Overall max. height for recirculation in in. (mm)	45 3/4 (1160)

DA 6698 W Puristic Edition 6000

Wall ventilation hood

with energy-efficient LED lighting and touch controls for simple operation.




EAN: 4002516024620 / Material number: 10877010 / Old Material Number: 28669850USA

Net weight in lbs. (kg)	58 (26.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum distance above electric cooktops in in. (mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
<b>Installation notes</b>	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
<b>Accessories supplied</b>	
Reducer from 150 to 125 mm Ø	•
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Non-return flap	•
<b>Optional accessories</b>	
OdorFree charcoal filter	DKF 12-900

DA 6698 W Puristic Edition 6000

Wall ventilation hood

with energy-efficient LED lighting and touch controls for simple operation.

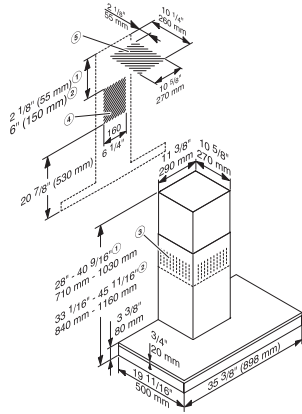

DA 6698 W, CLST (Installation drawing) – USA

1. Extraction, 2. Recirculation, 3 Ventilation grilles at the top for recirculation, 4. + 5. Vent cut-out positions (Area 5 not required for recirculation)