


PFD 102 i [120V]

Integrated dishwasher

for large loads of dishware in households, offices and utility areas.

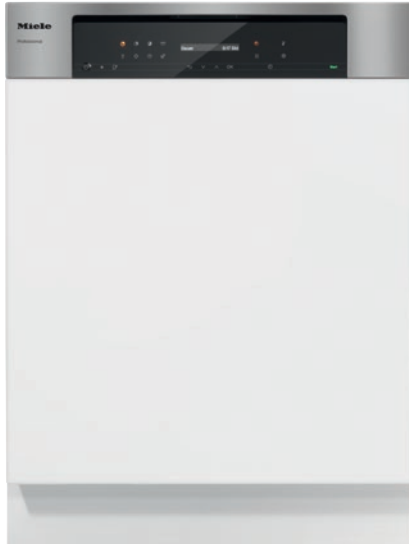

- Wash performance: 13 place settings in just 52 min.*
- Flexible loading of wash items for the best cleaning results
- Perfect lighting for easy loading – BrilliantLight
- Everything completely dry – AutoOpen assisted drying
- Intuitive to operate thanks to clear fascia panel design

* Depending on site conditions (temperature of incoming water / power connection) values given may vary.


EAN: 4002516366867 / Material number: 11605430 / Old Material Number: 61010201USA

Model and design	
Model	Semi-integrated dishwasher
Range	ProfiLine
Wash system	Fresh water
Number of levels	2
Front	Without front
Side walls	Galvanised
Fascia color	Cleansteel
Minimum front panel weight in lbs	4.0
Maximum front panel weight in lbs	11.0
Application	
Suitable for retirement and care homes	•
Suitable for hospitals	•
Suitable for Bed & Breakfast	•
Suitable for child care facilities	•
Suitable for universities and schools	•
Suitable for offices	•
Suitable for domestic use	•
Suitable for small businesses	•
Suitable for sports clubs	•
Performance data	
Tested virucidal efficacy	•
Circulation pump, Qmax in gal/min (l/min)	283.9 (75)
Shortest program duration in min.	52
Maximum final rinse temperature in °F (°C)	180 (82)
Cleaning performance, place settings/cycle	13
Service life in wash cycles	12500
Controls	
Control system	Electronic controls
Program selection	Program Selector Buttons
Max. delay start in h	24
Countdown indicator	•
Programs [quantity]	8
Program sequence indicator	•
Choice of display language	•
Check filter indicator	•
Standard electrical connection	
Electrical connection	AC 120V 60HZ
Heater rating in kW	1.30
Total connected load in kW	1.40
Fuse rating in A	15
Length of power cord in ft (m)	5 (1.70)
NEMA plug: 5-15	•
Possible voltage variant 1	
Electrical connection	2N AC 120/208-240V, 60HZ
Heater rating in kW	3.50-3.80
Total connected load in kW	3.70-4.00
Fuse rating in A	30

PFD 102 i [120V]

Integrated dishwasher

for large loads of dishware in households, offices and utility areas.

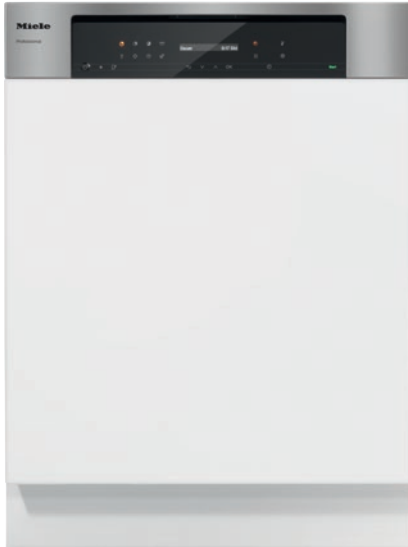


EAN: 4002516366867 / Material number: 11605430 / Old Material Number: 61010201USA

Water connection/drainage	
Cold or hot water [number]	1
Required flow pressure in bar	0.30-10.00
Drain hose [DN]	22
Maximum delivery head for drain pump in inches (cm)	39 3/8 (100)
Integrated water softener	•
Maximum water hardness in gpg (mmol/l)	6.5 (6.50)
Water protection system	Waterproof system
Length of water inlet hose in inches (cm)	59 1/8 (150)
Length of water drain hose in inches (cm)	59 1/8 (150)
Dimensions and weight	
External dimensions, net height in inches	31 3/4 (805)
External dimensions, net width in inches	23 5/8 (598)
External dimensions, net depth in inches	22 1/2 (570)
External dimensions, gross height in inches	37 7/8 (960)
External dimensions, gross width in inches	26 1/2 (670)
External dimensions, gross depth in inches	27 5/8 (700)
Usable space in wash cabinet, width in inches (mm)	21 3/8 (540)
Usable space in wash cabinet, height in inches (mm)	20 1/8 (510)
Usable space in wash cabinet, depth of upper basket in inches (mm)	17 3/4 (450)
Usable space in wash cabinet, depth of lower basket in inches (mm)	17 3/4 (450)
In-feed height above floor in inches (mm)	8 3/8 (210)
Net weight [kg]	93 (42)
Gross weight in lbs.	109 (49)
Maximum floor loading in N	1000
Emissions data	
Sound power (LwA) in dB(A) re 1 pW	48.0
Programs	
Universal	•
Short	•
SaniWash	•
Cold/Pre-wash	•
Glasses	•
Plastic	•
EnergySave/Economy	•
Intensive	•
Basket design	
ExtraComfort baskets	•
Flexible FlexLine basket design	•
FlexCare glass holder [number]	2
FlexCare cup rack [number]	1
Cutlery basket	•
Height-adjustable upper basket	•
Features	
Commercial-grade electrical connection	•
Drying	AutoOpen assisted drying, Extra drying,
1 Combi dispenser/door for powder and liquid media	•
Wash cabinet made from high-quality stainless steel	•

PFD 102 i [120V]

Integrated dishwasher

for large loads of dishware in households, offices and utility areas.

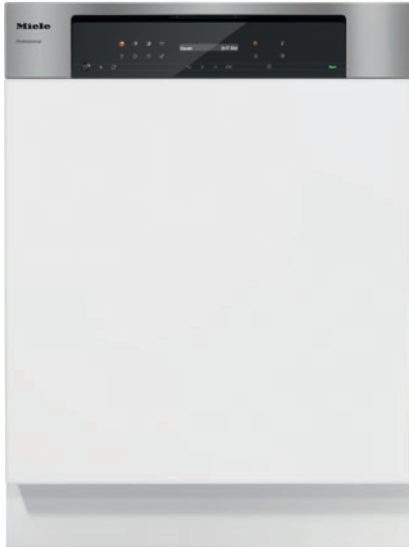

EAN: 4002516366867 / Material number: 11605430 / Old Material Number: 61010201USA

LED Lighting	•
EcoFeedback	•
Brilliant GlassCare	•
Child lock	•
Adjustable final rinse temperature	•
Optical interface	•
SmartStart	•
FlexiTimer with EcoStart	•
Test certificate	
CE	•
Complies with Machinery Directive 2006/42/EC	•
VDE	•
EMC radio suppressed	•
EN 1717	•
UL	•