

INSTALLATION INSTRUCTIONS

For item #4718-892

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1 & Fig. 2)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove old fixture, including mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Pass fixture wires up through center stem (M). Screw center stem (M) to fixture body. Pass fixture wires up through fixture loop (P). Screw fixture loop (P) to center stem (M).
4. Screw second center stem (M) onto top of fixture body. Screw fixture loop (P) onto top of center stem (M).
5. With the ground screw facing out, thread mounting screws (E) into mounting bracket (A) holes. Screws can be adjusted if necessary.
6. Carefully pull house wires through hole in mounting bracket (A). Place mounting bracket (A) over junction box and secure with junction box screws (B).
7. Attach one quick link (G) to each fixture loop (P) and chain (H). Ensure quick links (G) are completely closed. Determine desired hanging height of fixture. Use chain pliers to open chain links. Remove excess chain. Ensure chains are of equal length. Weave fixture wires through chain links. Slide wires through canopy (D). Attach second quick links (G) to chain (H) and canopy loops (D). Ensure quick links (G) are completely closed.

CONNECTING THE WIRES (Fig. 3)

8. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
9. Tuck wire connections neatly into junction box.

INSTALLING THE FIXTURE (Fig. 1)

10. Slide canopy (D) over mounting bracket (A) and secure with threaded caps (F).
11. Slide cups (K) over sockets.
12. Install (8) eight candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Fig. 1

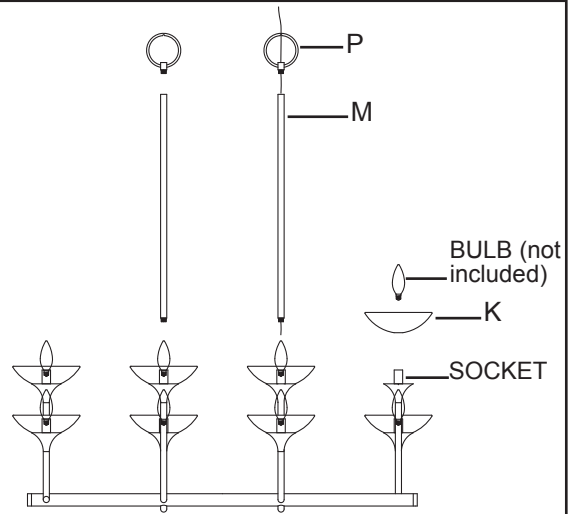


Fig. 2



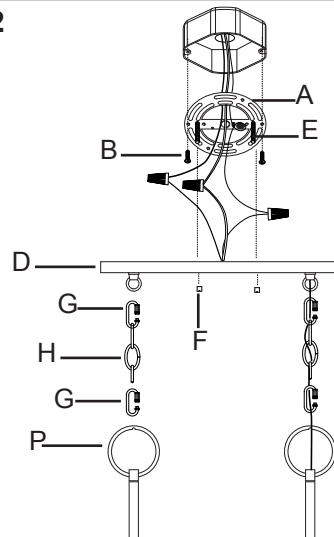


Fig. 3

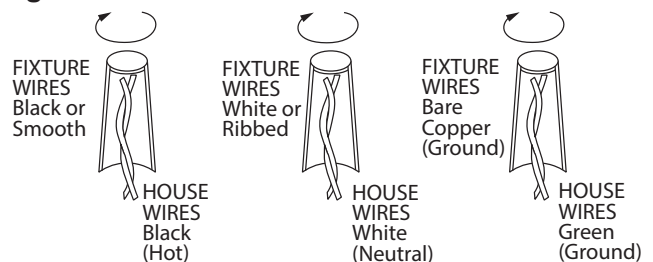

Your installation is now complete. Return power to the junction box and test the fixture.

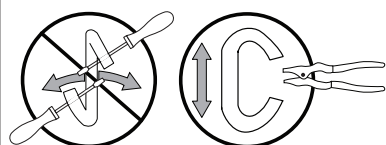

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

