

# INSTALLATION INSTRUCTIONS

Item#5035-66A (New. 02/27/2023)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig. 1 & Fig. 4)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture, including mounting hardware.
2. Carefully unpack your new fixture from carton and check that all parts are included as shown in the illustration.
3. Adjust arms to proper position. (Fig.4)
4. Determine the desired hanging height and thread rods (B & C) to coupling (D), carefully feed wires through each rod as you assemble.
5. Attach fixture loop (A) by threading onto rod (B).
6. Attach cap (F) with screws (G) to hole (E) of fixture.

### HANGING THE FIXTURE (Fig. 2)

7. Thread all thread into ceiling loop until snug.
8. Thread other end of all thread into crossbar, then use lock washer and hex nut to secure all thread into the crossbar. Note: The length of all thread into crossbar may be adjusted if necessary.
9. Take the crossbar assembly and mount it to ceiling outlet box (Not included) with mounting screws (Size: #8-32N\*L1"). The side of crossbar marked with "GND" must face out.
10. Slide lock collar and canopy over rods and allow them to rest on fixture body.
11. Open quick link and attach it to fixture loop and ceiling loop, then close quick link.
12. Carefully feed wires through quick link, ceiling loop and all thread assembly.

### CONNECTING THE WIRE (Fig. 3)





13. Connect the electrical wire as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixtures ground wire to it. Otherwise, connect fixture ground wire directly to crossbar using green screw provided.
14. Tuck wire connections neatly into the outlet box and then raise canopy all the way to the ceiling.
15. Raise lock collar and thread onto ceiling loop protruding through canopy.

### FINISHING THE FIXTURE (Fig.1)

16. Install (5) five candelabra base bulbs (H) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification — DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

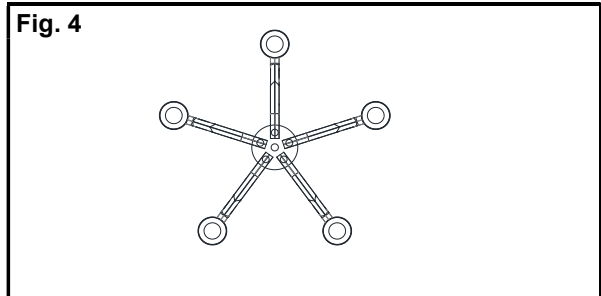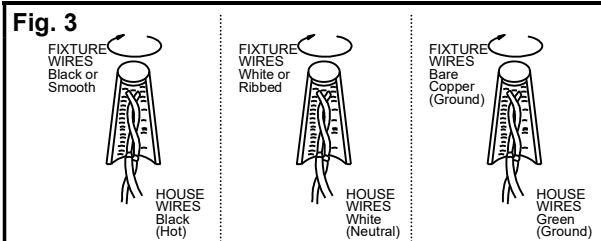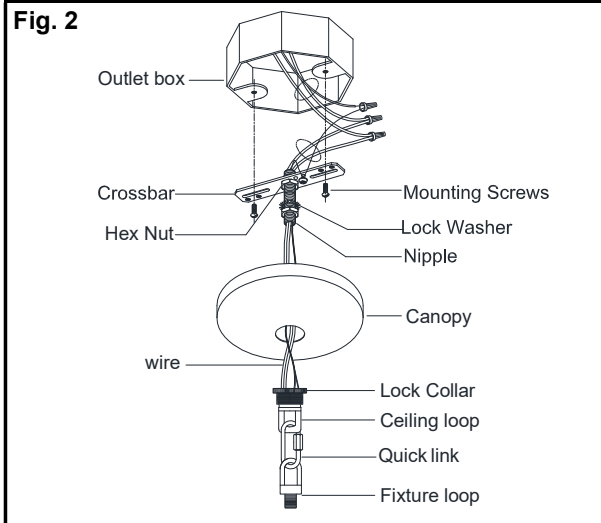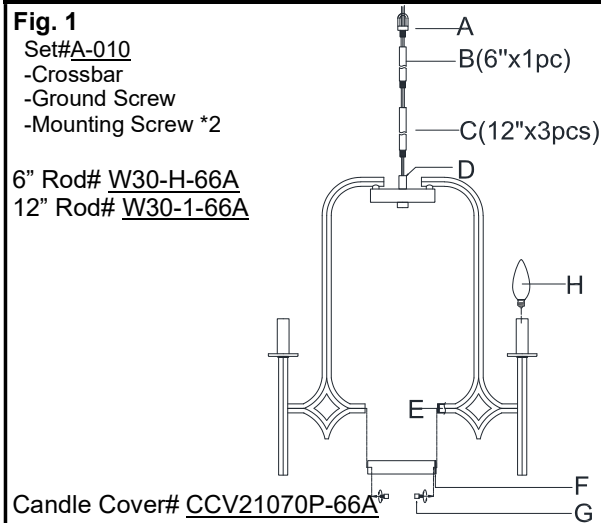

5035-66A

