

INSTALLATION INSTRUCTIONS FOR 4231-288

©Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Studs (A) about 1/4" into the pre-drilled holes in the mounting strap spaced the same distance apart as the holes in the fixture canopy (B).
4. Install the mounting strap to the Junction Box with the two Junction Box Screws as shown. The side of the mounting strap marked "GND" must face out.
5. Feed fixture wires through center tube (G). Connecting center part (G) to lamp body (H) and turn clockwise until firmly tightened.
6. Feed fixture wires through center tube (F). Connecting center part (F), if needed, to part (G) and turn clockwise until firmly tightened.
7. Feed fixture wires through center tube (E). Connecting center part (E), if needed, to part (F) and turn clockwise until firmly tightened.
8. Feed fixture wires through center tube (D). Connecting center part (D), if needed, to part (E) and turn clockwise until firmly tightened.
9. Connecting canopy (B) to part (D) and turn clockwise until firmly tightened.
10. While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
11. Then cover the junction box with canopy (B), aligning the Screw of mounting plate with the hole of canopy and lock it with brass ball (C).
12. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
13. Place the glass shade (J) into the metal frame (H), and then attach the screw (I) to the bottom of the metal frame (H), the glass shade (J) and the rubber washer (K) and lock it securely with the ball nut (L).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

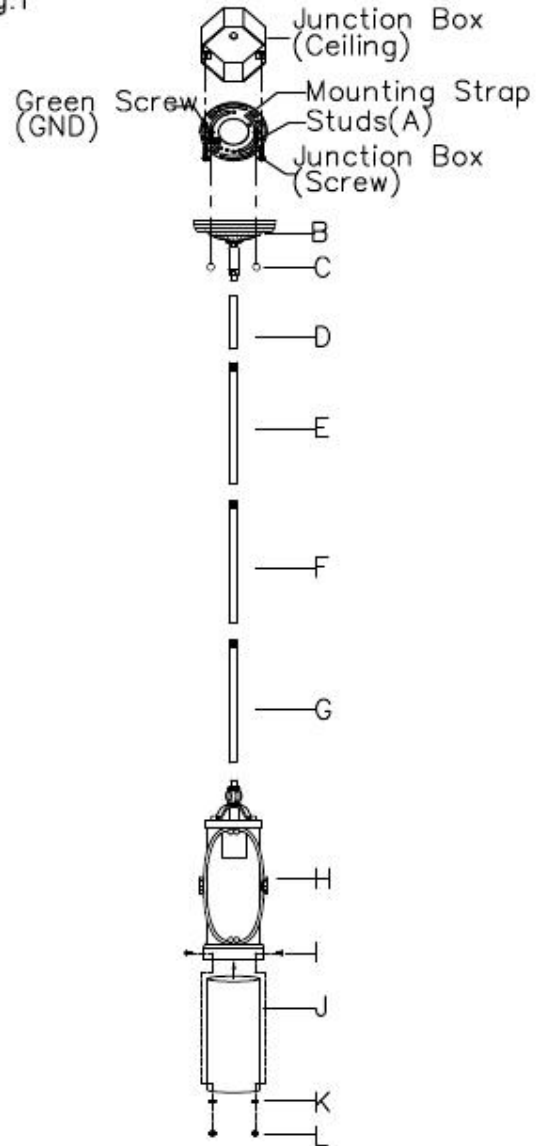


Fig.2

