

INSTALLATION INSTRUCTIONS

Item#2076-870/860 (New. 2025/07/02)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Thread canopy screws (C) into pre-drilled holes on mounting plate (A). Spaced same distance apart as holes in canopy (F), and secure with nuts (D) provided. The length of canopy screw (C) may be adjusted if necessary.
4. Attached mounting plate (A) to outlet box (Not included) using mounting screws (B) (Size: #8-32N*L1"). The side of mounting plate (A) marked with "GND" must face out.
5. Thread stem (J) to the fixture (K), then install metal ring (I) onto the stem (J).
6. Thread the rod (H) to the metal ring (I), then attach canopy (F) by threading onto rod (H) as shown in (Fig.1)
7. The support cable is provided to support the weight of fixture while wiring. Align fixture to mounting plate (A) and attach hook on end of support cable (E) into a slot located on mounting plate (A). Carefully allow support cable (E) to support weight of fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
9. Tuck the wire connectors neatly into outlet box.

FINISHING THE INSTALLATION (Fig.1)


10. Raise canopy (F) over canopy screws (C) and secure with cap nuts (G).
11. Install (6) six candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Hook ceramic pieces (D6,C6,B6,A6) to the second tier of the metal ring (I) in the order shown in the diagram cyclically.
13. Hook ceramic pieces (A6,B6,C6,D6) to the first tier of the metal ring (I) in the order shown in the diagram cyclically (Fig.1).

Your installation is now complete. Return power to outlet box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


Fig. 1

Set#A-020-A
-Mounting Screw *2
-Green Screw
-Mounting Plate

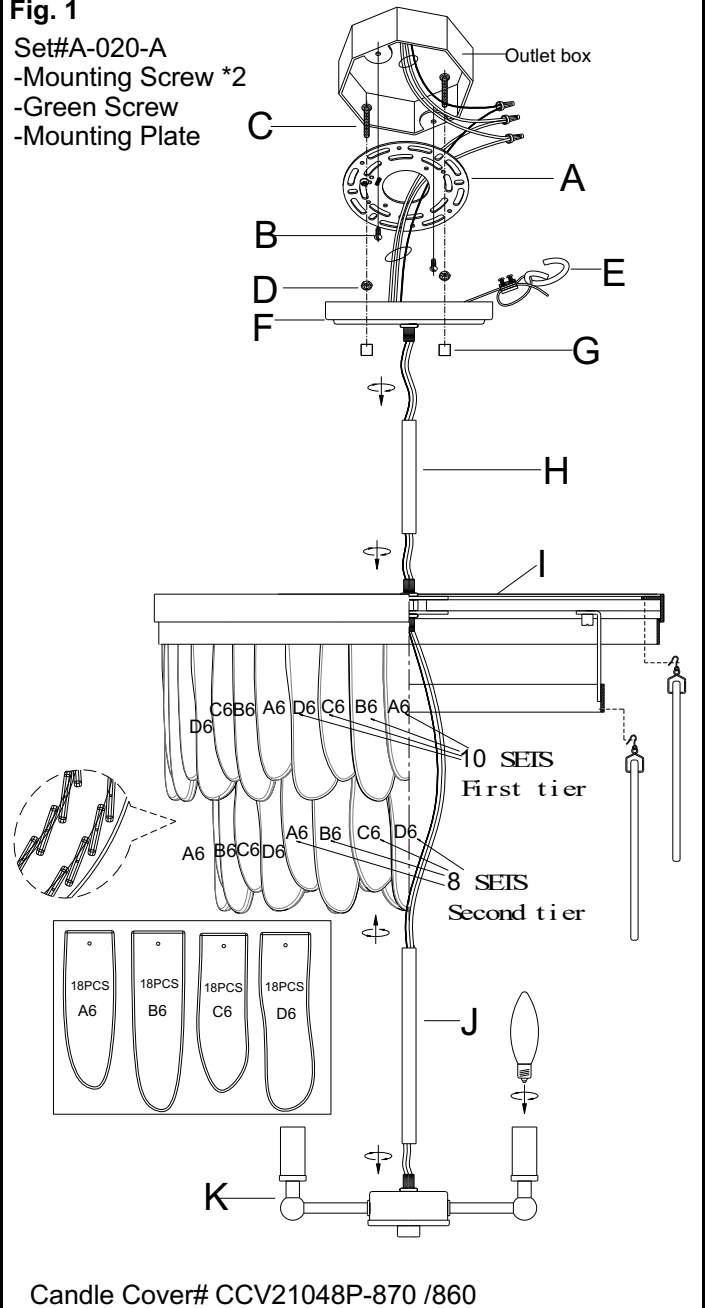

Candle Cover# CCV21048P-870 /860

Fig. 2

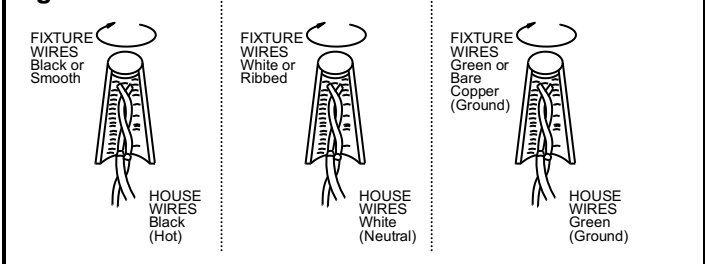

Intertek

american
lighting
association

2076-870/860