

INSTALLATION INSTRUCTION FOR FIXTURE 6481

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE

1. Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from wall. Including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the mounting plate (A) to the outlet box using the outlet box screws. The side of the mounting plate marked "GND" must face out.
4. Follow the wiring instructions carefully (See Fig.2).
5. Attach the fixture back plate (B) over the mounting plate (A) well, and secure with 2 mounting screws (F) tightly.
6. Put the glass shade (E) over the socket (G) and secure it with the spacer ring (D) and socket ring (C).
7. Install the light G9 Xenon bulb (H) in accordance with fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nuts were secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.2

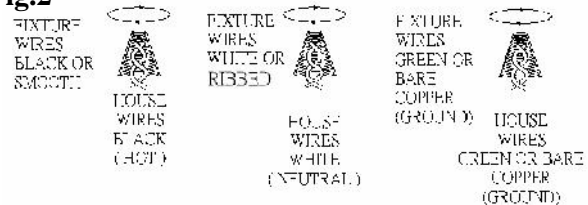


Fig.1

