

INSTALLATION INSTRUCTION FOR FIXTURE 5810

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE

1. Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from ceiling. Including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread 2 mounting screws (C) through the mounting screw holes from the back of the Cross Bar (The Side without "GND" mark).
4. Attach Cross bar (A) to the Outlet box using 2 Box Screws (B). The side of the Cross Bar (A) marked "GDN" must face out.
5. Follow the wiring instructions carefully (See Fig.2).
6. Attach the fixture main body (D) onto the outlet box by protrude 2 mounting screws through the mounting screw holes on the fixture back plate, then tighten it with 2 ball nuts (E).
7. Put the glass shade (F) onto the cap and socket. Tighten it by threading the socket ring (G) onto the socket.
8. Install the light bulb in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nut was secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw on the cross bar.
2. Tuck the wire connections neatly into the ceiling junction box.

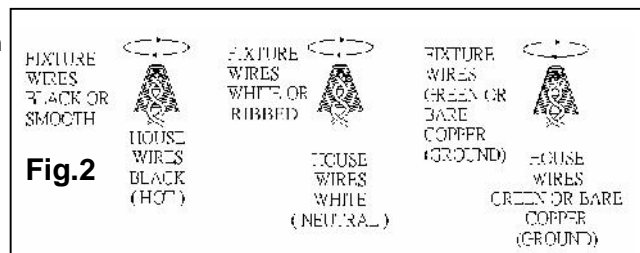


Fig.1

