

INSTALLATION INSTRUCTIONS FOR 5174

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

READ AND SAVE THESE INSTRUCTIONS

PREPARATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.

MOUNTING THE FIXTURE (Fig. 1)

3. Secure hanging bracket (A) to the outlet box with junction box screws (B) (Size: #8-32*0.6"L). The side of the hanging bracket marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

4. Connect the fixture wires to the junction box wires as shown in Fig. 2, making sure all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect your fixture's ground wire to it. Otherwise, connect your fixture's ground wire directly to the hanging bracket with the green screw provided. Tuck the wire connectors neatly into the wall junction box.

COMPLETING THE INSTALLATION

5. Place the fixture body (D) to hanging bracket (A), and secure with mounting screws (C) (Size: #8-32*0.3"L).
6. Place glass (F) over socket (E), secure with socket ring (G) by using spanner (H) provided.
7. Install the light bulb (not included) in accordance with the fixture's specifications.

DO NOT EXCEED THE MAXIMUM WATTAGE!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return the power to the junction box and test the fixture.

Fig.1

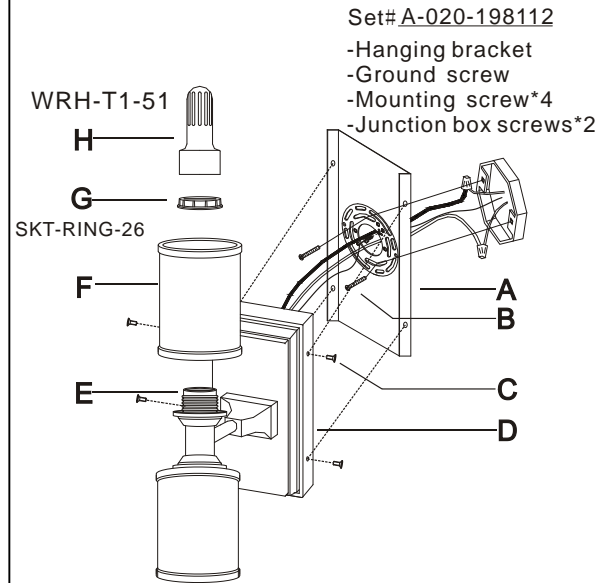


Fig.2

