

# INSTALLATION INSTRUCTIONS FOR 5470-562

## For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE

#### INSTALLATION(Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack the new fixture and lay all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. Thread the two mounting screws about 1/4" into the pre-drilled holes in the mounting plate, spaced about the same distance apart as the holes in the fixture back plate. Attach the mounting plate to the junction box using two junction box screws (Size:#8-32\*1"L). The side of the mounting plate marked "GND" must face out.
4. Guide fixture wires through hole in center of mounting plate.
5. Follow wiring instructions carefully (see fig. 2)
6. Mount fixture by aligning mounting holes in fixture back plate with mounting screws and threading ball nuts (E) onto mounting screws.
7. Install the light bulb (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Place the arm (B) and the glass (C) onto the fixture body (D) aligning the hole, and then lock it securely with the screw (A).

#### WIRING (Fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw (Size: #8-32\*3/8"L) on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1


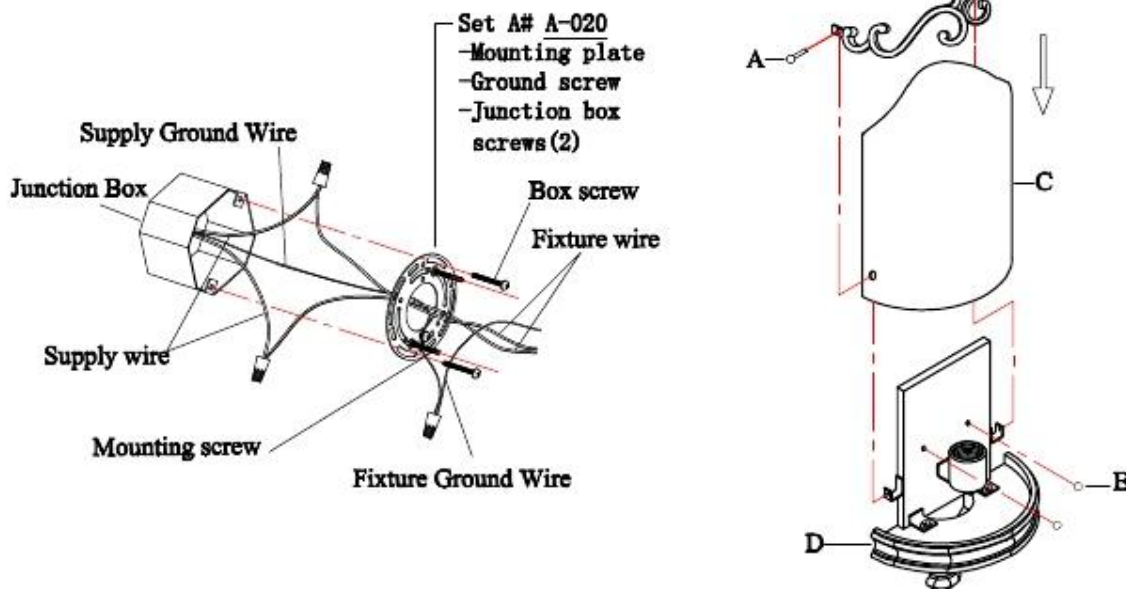


Fig.2



MIN 90°C SUPPLY CONDUCTORS

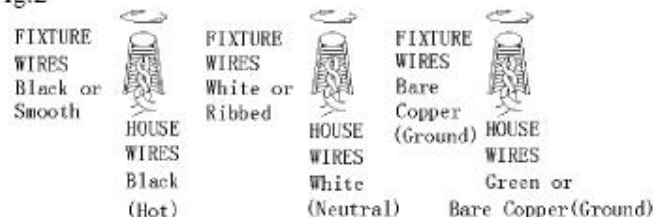