

INSTALLATION INSTRUCTIONS FOR 6120-563

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Mounting the Fixture

INSTALLATION (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack the new fixture and lay all the parts on a clear area. Take care not to lose any parts necessary for installation.
3. Attach the crossbar to the junction box using two junction box screws (Size: #8-32*1"L). The side of the crossbar marked "GND" must face out.
4. Thread the nipple part way into the center hole of the crossbar and secure with hex nut.
5. Follow wiring instructions carefully (see fig.2)
6. Place the fixture body (A) over the nipple, then tighten it with the cap nut (B).
7. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Raise the glass shade (D) to the fixture body (A), aligning the glass hole with the pipe (C), then screw it with the brass nut (E), attach the finial base (F) to the end of the pipe (C) and tighten it firmly with the ball (G).
9. Hang the adorning (H) to the loop on the ball (G).

WIRING (Fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw (Size: #8-32*3/8"L) on the crossbar.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1


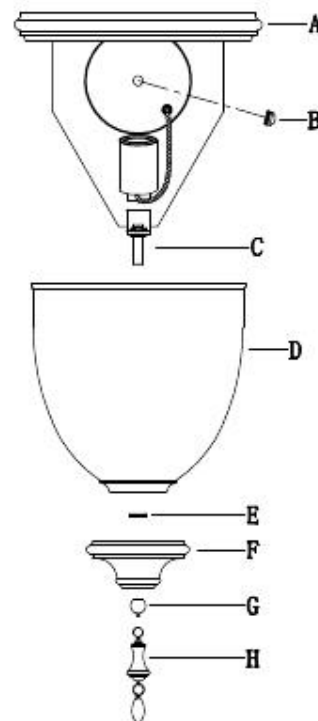


Fig.2

<p>FIXTURE WIRES Black or Smooth</p> <p>HOUSE WIRES Black (Hot)</p>	<p>FIXTURE WIRES White or Ribbed</p> <p>HOUSE WIRES White (Neutral)</p>	<p>FIXTURE WIRES Bare Copper (Ground)</p> <p>HOUSE WIRES Green or Bare Copper (Ground)</p>
---	---	--

MIN 90°C SUPPLY CONDUCTOR

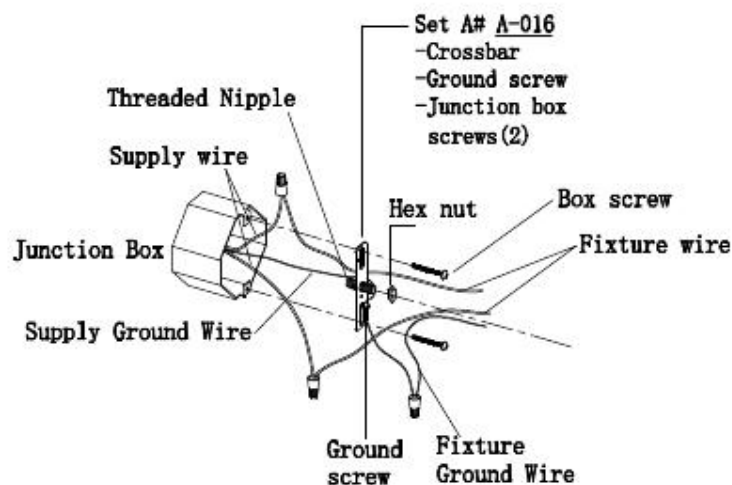