## **HLK02 SERIES**

## **BALL KNOB**





Available Finishes:



US15 Satin Nickel



US26D Satin Chrome

## **FEATURES & OPTIONS:**

- Door Thickness Fit 1-3/8" to 1-3/4" standard door thickness
- Door Preparation Cross bore: 2-1/8", edge: 1"
- Latch Backset Adjustable 2-3/8" or 2-3/4"
- Latch 2-way radius
- Latch Faceplate 1" x 2-1/4" radius corner
- Spindle Type Square
- Bolt 1/2" throw
- Cylinder Zinc cylinder KW1 keyway 5 brass pins
- Keys 2 brass keys, nickel plated, stamped with key code
- Standard Strike Plate 2-1/4" x 1-3/4" radius corner
- Material Stainless steel, steel, zinc alloy and brass
- ANSI/BHMA A156.2 grade 3 certified

#### **FUNCTIONS:**

• Entry - (F109)

Both knobs locked or unlocked by key outside or turn-piece inside

Privacy – (F76)


Both knobs locked or unlocked by turn-piece inside. Outside lever unlocked by coin or screwdriver

• Passage - (F75)

Latch retracted by knobs at all times

Dummy

Pull one/both side, no mechanical operation

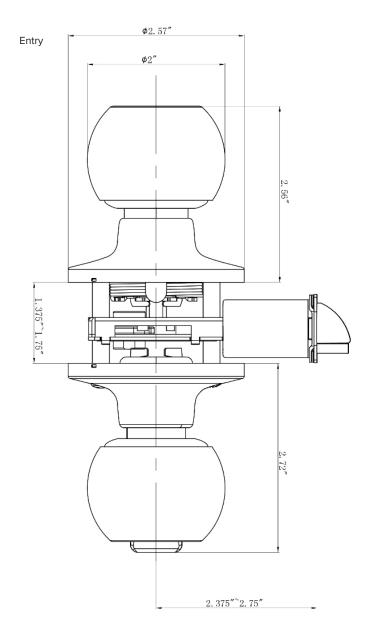

### **WARRANTY:**


- Limited Lifetime Mechanical Warranty
- · Limited 5-Year Finish Warranty


©2020 PL Sourcing, Inc. 1020 2230576 HLK02\_Spec.pdf Page 1 of 2


# HLK02 SERIES BALL KNOB





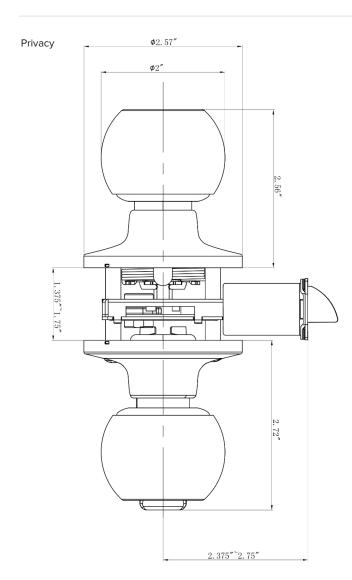

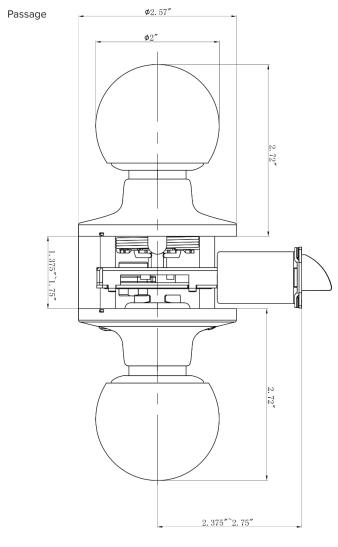



©2020 PL Sourcing, Inc. 1020 2230576 HLK02\_Spec.pdf Page 2 of 2

Dummy