

FEATURES & OPTIONS:

- Door Thickness Fit 1-3/8" to 1-3/4" standard door thickness
- Door Preparation Cross bore: 2-1/8", edge: 1"
- Latch Backset Adjustable 2-3/8" or 2-3/4"
- Latch 2-way radius
- Standard Latch Faceplate 1" x 2-1/4" radius installed
- Spindle Type Square
- Bolt 1/2" throw
- Cylinder Zinc cylinder KW1 keyway 5 brass pins
- Keys 2 brass keys, nickel plated
- Standard Strike Plate 2-1/4" x 1-3/4" round corner full lip
- Material Steel and brass
- ANSI/BHMA Meets the requirements of grade 3

FUNCTIONS:

- Entry (F109)
 Both knobs locked or unlocked by key outside or turn-piece inside
- Privacy (F76)


Both knobs locked or unlocked by turn-piece inside. Outside lever unlocked by coin or screwdriver

• Passage – (F75)

Latchbolt operated by knobs from either side at all times

Dummy

Pull one/both side, no mechanical operation

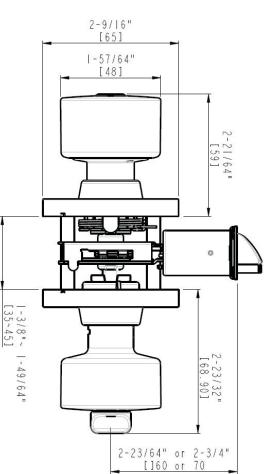

WARRANTY:

Limited Lifetime Mechanical Warranty

• Limited 5-Year Finish Warranty

HLK82 SERIES DESIGNER SQUARE DEADBOLT





Available Finishes: US15 Satin Nickel

lickel

US26 Polished Chrome US10B Oil Rubbed Bronze Satin Brass Champagne Brass


Matte Black


FEATURES & OPTIONS:


- Door Thickness Fits 1-3/8" to 1-3/4" standard door thickness
- Door Preparation Cross bore: 2-1/8", edge: 1"
- Latch Backset Adjustable 2-3/8" or 2-3/4"
- Latch 2-way radius
- Standard Latch Faceplate 1" x 2-1/4" radius
- Spindle Type Flat bar
- Bolt 1" throw, anti cut pin or pins
- Cylinder Zinc cylinder KW1 keyway 5 brass pins
- Keys 2 brass keys, nickel plated, stamped with key code
- Strike Plate Matched to latch
- Rosette Zinc die cast
- Material Steel, zinc and solid brass
- ANSI/BHMA Meets the requirements of A156.5 grade 3

FUNCTIONS:

 Single Cylinder Deadbolt – (F17) The outside locked and unlocked with a key and the inside locked and unlocked by a thumb turn





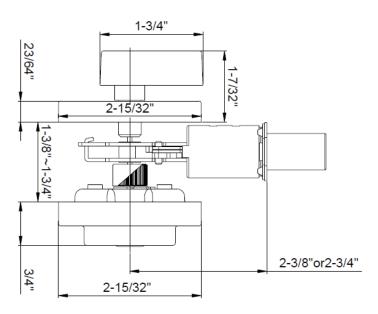

WARRANTY:

Limited Lifetime Mechanical Warranty

Limited 5-Year Finish Warranty