

Specification guide

Model: 6340XXXX



(Items other than the mirror shown in the picture above are not included)

FEATURES

- Energy Efficient and Long-Lasting LED Lighting
- Frosted Pattern Around All Sides
- Mirror on 2 Sides for a Cleaner Look.
- Dual Switches (Rocker & IR Sensor) for Added Convenience
- 5mm Copper-Free Mirror
- Durable Aluminum Frame with Steel Back Panel
- Surface-Mount with French Cleat Mounting Bracket
- Horizontal or Vertical Mounting
- Hardwired (Junction box required)

LIGHTING

- Front-Facing Lighting
- Average Bulb Life of 50,000 hours
- CRI: 85+
- Color Temperature: 6000K (Daylight)
- Dimmable using Built-in IR Sensor*
- Brightness & Power Consumption: See Page 2
- Power Requirements: 110-130V AC, 60Hz


SAFETY

- Safety Backed Mirror
- IP44 Rated
- UL Listed

* Not compatible with wall dimmer switch.


OVERVIEW

Miseno does not cut corners and only uses the highest quality components and bulbs to make sure that the mirror will be maintenance free and function like the day you purchased for average 50,000 hours of use. **Miseno** prides itself on providing unmatched price vs quality for all of our products. All mirrors come with a 5-year limited warranty.

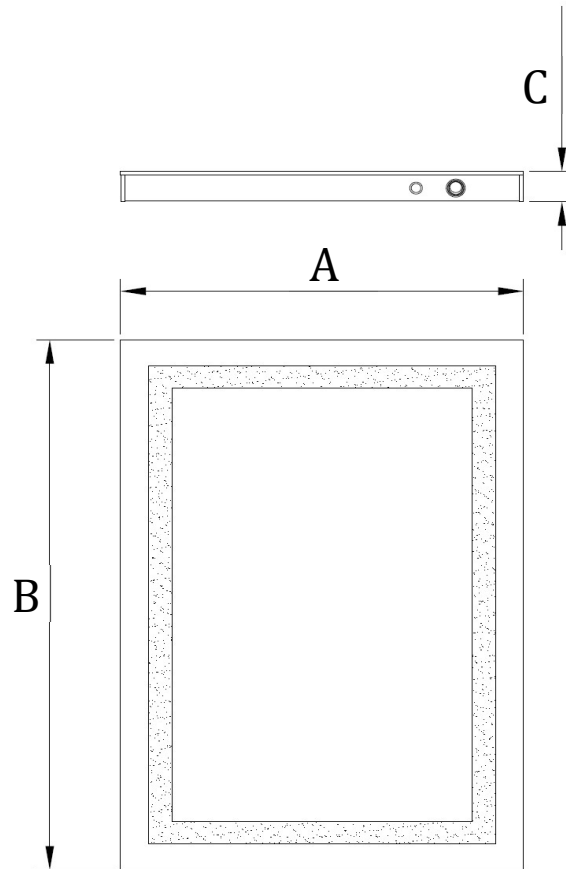

Model #	A	B	C	Brightness (Lumen)	Power Consumption (Watt)
63402028	20	28	1 5/8	1230	20
63402235	22	35	1 5/8	1490	25
63402432	24	32	1 5/8	1470	24
63402828	28	28	1 5/8	1470	24
63403042	30	42	1 5/8	1956	30
63403232	32	32	1 5/8	1728	28
63404040	40	40	1 5/8	2220	36
63405636	56	36	1 5/8	2580	42
63406028	60	28	1 5/8	2478	40
63408032	80	32	1 5/8	3244	49

ADA INSTALLATION GUIDES

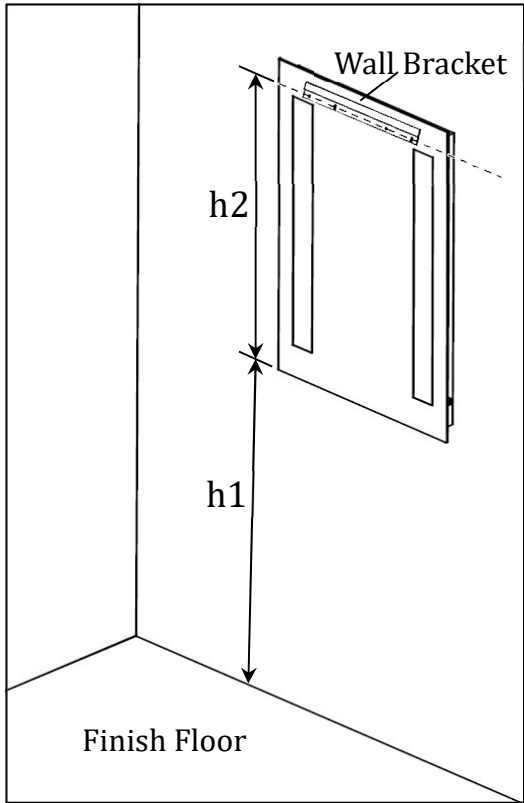

Installations Above Lavatories or Countertops				
Model #	Mounting	h1 min.	h1 max.	h2
63403042	Portrait	34 5/8	37 3/8	39 5/16
63404040	Portrait	36 5/8	37 3/8	37 5/16
63405636	Portrait	20 5/8	37 3/8	53 5/16
63406028	Portrait	16 5/8	37 3/8	57 5/16
63408032	Portrait	0	37 3/8	77 5/16

Other Installations				
Model #	Mounting	h1 min.	h1 max.	h2
63405636	Portrait	20 5/8	32 3/8	53 5/16
63406028	Portrait	16 5/8	32 3/8	57 5/16
63408032	Portrait	0	32 3/8	77 5/16

h1 = Distance from Finish Floor to bottom of the mirror.

h2 = Distance from bottom of the mirror to Wall Bracket mounting location.

NOTE:

1. Models MUST be mounted in the position as listed.
2. Models NOT listed in the charts are NOT compatible with ADA applications.