Specification guide

Model: 6350XXXX



(Items other than the mirror shown in the picture above are not included)

FEATURES

- Energy Efficient and Long-Lasting LED Lighting
- Acrylic Light Diffuser for Backlit Lighting
- 5mm Copper-Free Mirror
- Mirror Font IR Sensor Switch for Added Convenience
- Durable Aluminum Frame with Steel Back Panel
- Surface-Mount with French Cleat Mounting Bracket
- Horizontal or Vertical Mounting
- Hardwired (Junction box required)

LIGHTING

- Front-Facing & Backlit lighting
- Average Bulb Life of 50,000 hours
- CRI: 85+
- Color Temperature: 6000K (Daylight)
- Brightness & Power Consumption: See Page 2
- Power Requirements: 110-130V AC, 60Hz


SAFETY

- 5mm Safety Backed Mirror
- IP44 Rated
- UL Listed

OVERVIEW


Miseno does not cut corners and only uses the highest quality components and bulbs to make sure that the mirror will be maintenance free and function like the day you purchased for average 50,000 hours of use. **Miseno** prides itself on providing unmatched price vs quality for all of our products. All mirrors come with a 5-year limited warranty.

^{*} Not compatible with wall dimmer switch.

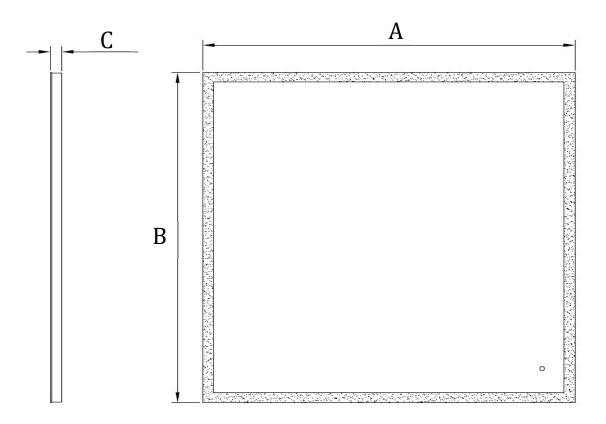

Model #	A	В	С	Brightness (Lumen)	Power Consumption (Watt)
63502432	24	32	1-1/4	1530	25
63504040	40	40	1-1/4	2250	36
63504635	46	35	1-1/4	2280	37
63504824	48	24	1-1/4	2010	33
63504830	48	30	1-1/4	2290	35
63505636	56	36	1-1/4	2610	42
63507230	72	30	1-1/4	2910	47
63508435	84	35	1-1/4	3625	55

ADA INSTALLATION GUIDES

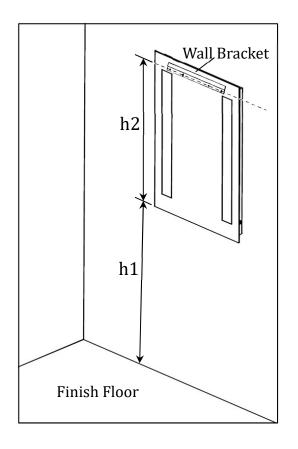

Installations Above Lavatories or Countertops								
Model #	Mounting	h1 min.	h1 max.	h2				
63504040	Portrait	35 1/4	38 11/16	36 3/16				
63504635	Portrait	29 1/4	38 11/16	42 3/16				
63504824	Portrait	27 1/4	38 11/16	44 3/16				
63504830	Portrait	27 1/4	38 11/16	44 3/16				
63505636	Portrait	19 1/4	38 11/16	52 3/16				
63507230	Portrait	3 1/4	38 11/16	68 3/16				
63508435	Portrait	0	38 11/16	81 3/16				

Other Installations								
Model #	Mounting	h1 min.	h1 max.	h2				
63504635	Portrait	29 1/4	33 11/16	42 3/16				
63504824	Portrait	27 1/4	33 11/16	44 3/16				
63504830	Portrait	27 1/4	33 11/16	44 3/16				
63505636	Portrait	19 1/4	33 11/16	52 3/16				
63507230	Portrait	3 1/4	33 11/16	68 3/16				
63508435	Portrait	0	33 11/16	81 3/16				

h1 = Distance from Finish Floor to bottom of the mirror.

h2 = Distance from bottom of the mirror to Wall Bracket mounting location.

NOTE:

- 1. Models MUST be mounted in the position as listed.
- 2. Models NOT listed in the charts are NOT compatible with ADA applications.