


LINE HIDE[®]

Lineset Cover System

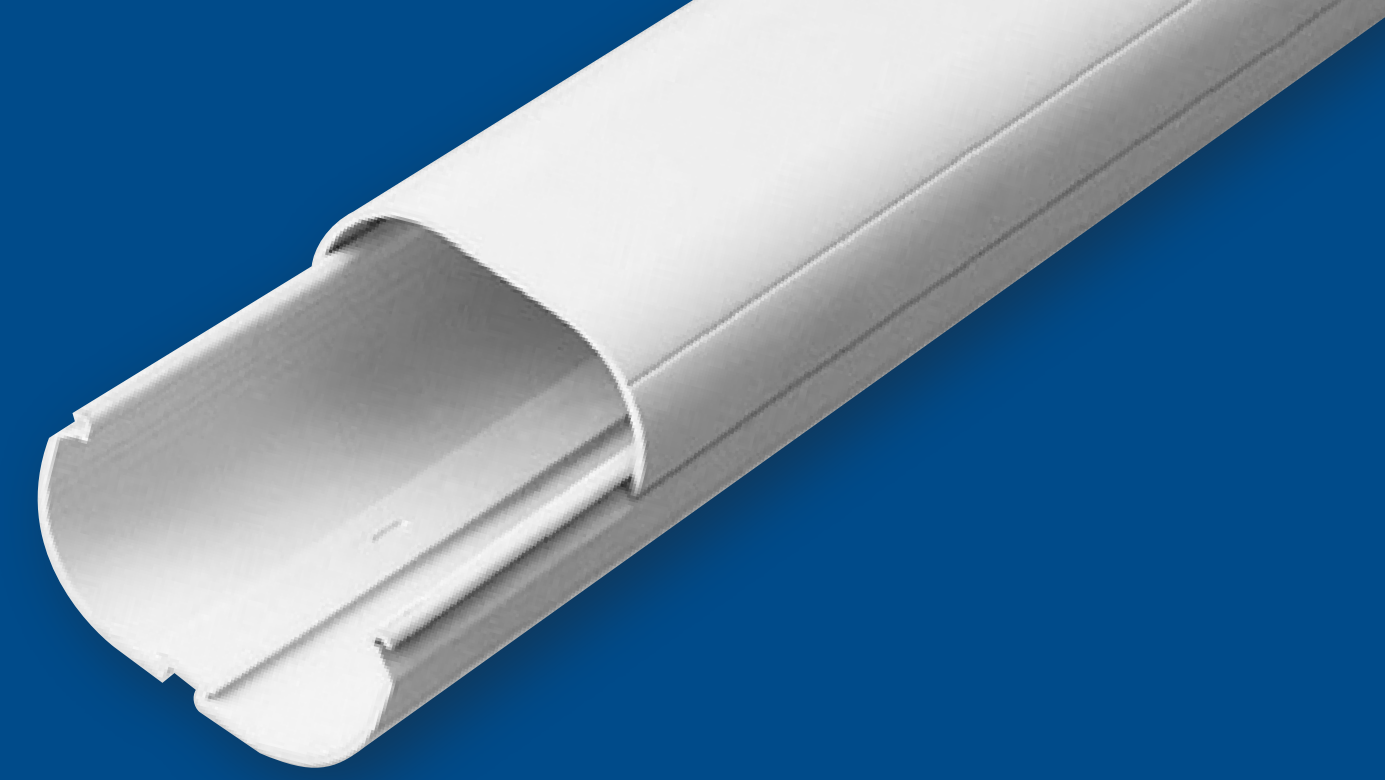

- Available in three sizes — 3", 4", and 6" tubes
- Snap-on covers and a full selection of couplings, elbows, T-joints, caps, and more for any application
- High-quality PVC with UV inhibitors
- Paintable
- Hide cabling, piping or wiring
- Meets UL 94 V-0 for interior applications


PRODUCT INFORMATION & SPECIFICATIONS

High-Drain • High-Drain Has Excellent Weatherability And Mold Resistance




	Inner Diameter x Outer Diameter (mm)	Length (m)/(ft)
DRX-14	ø14.5x19	50/164
DRX-16	ø16x20.5	50/164

Split Line Tube (PVC)




Product	A	B	C
CD-75	2-15/16"	2-7/16"	78-3/4"
CD-140	3-7/8"	2-11/16"	78-3/4"
CD-140	5-7/16"	3-1/16"	78-3/4"

Simple Wall Cover




Product	A	B	C	D	E
NY-75	3-1/4"	2-11/16"	8-1/4"	3-11/16"	3-1/4"
NY-100	4-3/16"	2-15/16"	9-1/8"	4-11/16"	3-3/4"
NY-140	5-3/4"	3-3/8"	11-1/4"	6-1/4"	4-1/8"

End Socket (Can Be Cut To Accommodate Various Lineset Combinations)




Product	A	B	C	D	E
NR-75	2-1/16"	1-3/16"	3-7/8"	3-1/4"	2-11/16"
NR-100	2-1/16"	1-3/16"	4-1/2"	4-3/16"	2-15/16"
NR-140	2-1/16"	1-3/16"	5-5/8"	5-3/4"	3-3/8"

Universal Elbow (Horizontal) Adjustable 45° To 90°Combinations




Product	A	B	C
NX-75	3-1/4"	2-11/16"	6"
NX-100	4-3/16"	2-15/16"	7-5/8"
NX-140	5-3/4"	3-3/8"	9-3/4"

Universal Elbow (Vertical) Adjustable 45° To 90°




Product	A	B	C
NZ-75	3-1/4"	2-11/16"	4-13/16"
NZ-100	4-1/8"	2-7/8"	4-5/8"
NZ-140	5-3/4"	3-7/16"	5-15/16"

45° Elbow (Horizontal)




Product	A	B	C
NM-75	3-1/4"	2-11/16"	2-15/16"
NM-100	4-3/16"	2-15/16"	3-5/16"
NM-140	5-3/4"	3-3/8"	4-3/16"

Variant Socket/Reducer (Used To Change Size Of Tube)



Product	A	B	C	D	E
NJ-75/100	3 3/8"	2-13/16"	3-1/8"	4-3/16"	2-15/16"
NJ-100/140	4-1/2"	3-1/16"	3-1/8"	5-3/4"	3-3/8"


T-Joint



Product	A	B	C	D	E
NT-75	3-1/4"	2-11/16"	4-3/4"	6-5/16"	1"
NT-100	4-3/16"	2-15/16"	6-5/16"	8-7/16"	1-3/8"
NT-140	5-3/4"	3-3/8"	7-7/8"	10"	1-3/8"


NT-75 supplied with 2 Reducing Adaptors (75>60) NT-100 supplied with 4 Reducing Adaptors: 2 - (100>60) & 2 - (100>75) NT-140 supplied with 2 Reducing Adaptors (140>100)

Flexible Joint (Polypropylene Material) Available In Nominal 2-Foot and 3-Foot Lengths



Product	A	B	C	D
NF-75	3"	2-1/2"	2-3/8"	21-5/8"
NF-75M	3"	2-1/2"	2-3/8"	39-3/8"
NF-100	4"	2-3/4"	2-15/16"	31-1/2"
NF-140	5-1/2"	3-1/8"	3-1/8"	39-3/8"


Mounting Block • Made Of Pvc Resin. Sturdy Outdoor Air Conditioner Stand



	H	W	L	Weight (lbs)	Color
DSD-400P	3.25"	3.25"	15.75"	265	Ivory


Each Block includes 2 DSD-EC End Caps and 2 DSD-MP Mounting Clips

Wall Cover/Inlet




Product	A	B	C	D	E
NW-75	3-1/4"	2-11/16"	8-1/4"	3-11/16"	3-1/4"
NW-100	4-3/16"	2-15/16"	9-1/8"	4-11/16"	3-3/4"
NW-140	5-3/4"	3-3/8"	11-1/4"	6-1/4"	4-1/8"

Socket/Coupling Joins Two Pieces Of Tubing




Product	A	B	C
NS-75	3-1/4"	2-11/16"	3-1/8"
NS-100	4-3/16"	2-15/16"	3-1/8"
NS-140	5-3/4"	3-3/8"	3-1/8"

Universal Elbow (Can Be Tilted At Various 360° Angles)




Product	A	B	C	D
NCX-75	3-5/32"	2-11/16"	4-1/2"	4-3/4"
NCX-100	4-3/16"	2-15/16"	5-5/16"	5-3/8"
NCX-140	5-3/4"	3-7/16"	7-1/2"	7-1/16"

90° Elbow (Horizontal)




Product	A	B	C
NE-75	3-1/4"	2-11/16"	5-9/16"
NE-100	4-3/16"	2-15/16"	6-5/16"
NE-140	5-3/4"	3-3/8"	7-7/8"

90° Elbow (Vertical)




Product	A	B	C
NC-75	3-1/4"	2-11/16"	4-7/8"
NC-100	4-3/16"	2-15/16"	5-5/16"
NC-140	5-3/4"	3-3/8"	5-7/8"

45° Elbow (Vertical)




Product	A	B	C
NU-75	3-1/4"	2-11/16"	2-13/16"
NU-100	4-3/16"	2-15/16"	3-1/4"
NU-140	5-3/4"	3-3/8"	3-11/16"

Wall Entry Fitting





Product	A	B	C
NK-75	4-15/16"	4-1/2"	5/8"
NK-100	6-7/8"	5-11/16"	5/8"
NK-140	8-11/16"	7-1/16"	5/8"

Corner Cap/Soffit Entry Fitting



Product	A	B	C	D	E
NA-75	3-5/16"	2-3/4"	2-5/8"	4-7/8"	4-15/16"
NA-100	4-5/16"	3"	2-5/8"	5-7/8"	5-1/2"
NA-140	5-13/16"	3-3/8"	2-5/8"	7-7/16"	6-1/8"

Saddle Band



Product	A
NV-S	11-13/16"
NV-L	14-3/16"

NV-L for 100 and 140; NV-S for 60 and 75
Base snaps into track in line tube to hold lineset in place.

- **Material** - Weather resistant, UV stabilized, ASA/PVC/ABS/Poly/PE
- **Temperature Range** - PVC: -4°F to 140°F ASA: -4°F to 194°F
- **Fire Rating** - PVC/ABS meets UL94v-0, Poly/PE meets UL94HB

- **Weather Resistance** - Pass 2,000 hour test to JIS DO 205
- **Standard Color** - Standard Paintable Ivory
- **Mounting** - Molded in mounting screw locations
- **Fitting Assembly Screws** - Stainless Steel