

MXZ-3C30NA3 2.5-TON MULTI-ZONE INVERTER HEAT-PUMP SYSTEM



Job Name:

System Reference:

Date:



FEATURES

- Variable speed INVERTER-driven compressor
- Optional base pan heater
- Quiet outdoor unit operation as low as 52 dB(A)
- High pressure protection
- Compressor thermal protection
- Compressor overcurrent detection
- Fan motor overheating/voltage protection

SPECIFICATIONS: MXZ-3C30NA3

| | | | |
|------------------------|--|---------|--|
| Indoor unit connection | Maximum Number of Connected IDU | | 3 |
| | Minimum Number of Connected IDU | | 2 |
| | Minimum connected capacity | BTU/H | 12,000 |
| | Maximum connected capacity | BTU/H | 36,000 |
| Piping | Liquid Pipe Size O.D. (Flared) | In.[mm] | A,B,C: 1/4 [A,B,C: 6.35] |
| | Gas Pipe Size O.D. (Flared) | In.[mm] | A: 1/2; B,C: 3/8 [A: 12.72; B,C: 9.52] |
| | Total Piping Length | Ft. [m] | 230 [70] |
| | Maximum Height Difference, ODU above IDU | Ft. [m] | 49 [15] |
| | Maximum Height Difference, ODU below IDU | Ft. [m] | 49 [15] |
| | Farthest Piping Length from ODU to IDU | Ft. [m] | 82 [25] |
| | Maximum Number of Bends for IDU | | 70 |

NOTES:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

| | | |
|--|----|------------------------------|
| ¹ Cooling (Indoor // Outdoor) | °F | 80 DB, 67 WB // 95 DB, 75 WB |
| ² Heating at 47°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // 47 DB, 43 WB |
| ³ Heating at 17°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // 17 DB, 15 WB |

Conditions ⁴Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

^A 5°F DB - 115°F DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance. Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

OUTDOOR UNIT ACCESSORIES: MXZ-3C30NA3

| | | |
|------------------|--|---------------|
| Air Outlet Guide | Air Outlet Guide (1 Piece) | PAC-SH96SG-E |
| Ball Valve | Refrigeration Ball Valve - 1/2" | BV12FFS12 |
| | Refrigeration Ball Valve - 1/4" | BV14FFS12 |
| | Refrigeration Ball Valve - 3/8" | BV38FFS12 |
| | Refrigeration Ball Valve - 5/8" | BV58FFS12 |
| Control Wire | M-Net Control Wire, 1,000' Roll (16-AWG, Standard, Twisted Pair, Shielded, Jacketed- Plenum rated) | CW162S-1000 |
| | M-Net Control Wire, 250' Roll (16-AWG, Standard, Twisted Pair, Shielded, Jacketed- Plenum rated) | CW162S-250 |
| Drain Socket | Drain Socket | PAC-SG60DS-E |
| Hail Guards | Hail Guard | HG-A9 |
| M-NET Converter | M-NET Converter | PAC-IF01MNT-E |
| Mini-Split Wire | 14 Gauge, 4 wire MiniSplit Cable—250 ft. roll | S144-250 |
| | 14 Gauge, 4 wire MiniSplit Cable—250 ft. roll | SW144-250 |
| | 14 Gauge, 4 wire MiniSplit Cable—50 ft. roll | S144-50 |
| | 14 Gauge, 4 wire MiniSplit Cable—50 ft. roll | SW144-50 |
| | 16 Gauge, 4 wire MiniSplit Cable—250 ft. roll | S164-250 |
| | 16 Gauge, 4 wire MiniSplit Cable—250 ft. roll | SW164-250 |
| | 16 Gauge, 4 wire MiniSplit Cable—50 ft. roll | S164-50 |
| | 16 Gauge, 4 wire MiniSplit Cable—50 ft. roll | SW164-50 |
| Mounting Pad | Condensing Unit Mounting Pad: 16" x 36" x 3" | ULTRILITE1 |
| | Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic | DSD-400P |
| Port Adapter | Adaptor: 1/2" x 3/8" | MAC-A455JP-E |
| | Adaptor: 1/2" x 5/8" | MAC-A456JP-E |
| | Adaptor: 3/8" x 1/2" | MAC-A454JP-E |
| | Adaptor: 3/8" x 5/8" | PAC-SG76RJ-E |
| Stand | 18" Single Fan Stand | QSMS1801M |
| | 24" Single Fan Stand | QSMS2401M |
| | Condenser Wall Bracket | QSWB2000M-1 |
| | Condenser Wall Bracket - Stainless Steel Finish | QSWBSS |
| | Outdoor Unit Stand — 12" High | QSMS1201M |

| | |
|-------------------|-------|
| Job Name: | |
| System Reference: | Date: |



Indoor Unit: MFZ-KJ12NA-U1



Wireless Remote Controller

SPECIFICATIONS:

| Rated Capacity* | | |
|-------------------------------|-----------|--------|
| Cooling ¹ | Btu/h / W | 12,000 |
| Heating at 47° F ² | Btu/h / W | 13,000 |

Rating Conditions per AHRI Standard:

¹ Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB ; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB

² Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB ; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

| Electrical Power Requirements | 208 / 230V, 1-Phase, 60 Hz | |
|-------------------------------|----------------------------|--|
|-------------------------------|----------------------------|--|

| Minimum Circuit Ampacity (MCA) | A | 1 |
|--------------------------------|---|---|
|--------------------------------|---|---|

| Blower Motor (ECM) | F.L.A. | 0.62 |
|--------------------|--------|------|
|--------------------|--------|------|

| Blower Motor Output | W | 30 |
|---------------------|---|----|
|---------------------|---|----|

| Field Drainpipe Size O.D. | In.(mm) | 5/8 (15) |
|---------------------------|---------|----------|
|---------------------------|---------|----------|

Airflow Rate (Quiet - Lo - Med - Hi - Super Hi)

| | | | |
|---------|-----|-----|---------------------|
| Cooling | DRY | CFM | 138-173-208-251-275 |
| | WET | | 117-147-177-213-234 |
| Heating | DRY | | 138-159-180-219-343 |

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

| | | |
|---------|-------|----------------|
| Cooling | dB(A) | 21-25-30-34-38 |
| Heating | | 21-24-27-32-41 |

| Unit Dimensions (H x W x D) | In.(mm) | 23-5/8 x 29-17/32 x 8-15/32 (600 x 750 x 215) |
|-----------------------------|---------|---|
|-----------------------------|---------|---|

| Package Dimensions (H x W x D) | In.(mm) | 27-3/4 x 32-3/4 x 12 (693 x 816 x 275) |
|--------------------------------|---------|--|
|--------------------------------|---------|--|

Unit/Package Weight

| | | |
|---------|----------|-----------|
| Unit | Lbs.(kg) | 33 (15) |
| Package | Lbs.(kg) | 41 (18.5) |

| External Finish | Munsell 1.0Y 9.2 / 0.2 | |
|-----------------|------------------------|--|
|-----------------|------------------------|--|

Refrigerant Piping (Flared)

| | | |
|------------------------|---------|------------|
| Liquid (High Pressure) | In.(mm) | 1/4 (6.35) |
| Gas (Low Pressure) | | 3/8 (9.52) |

ACCESSORIES:

Indoor Unit

- Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- Condensate Pump (Sauermann SI30-115/230; 115/230V)
- Anti-Allergy Enzyme Filter (MAC-408FT-E)
- Platinum Catalyst Deodorizing Filter (MAC-308FT-E)
- Drain Pan Level Sensor (DPLS2)


Controls

- Wireless Controller (MHK1)
- Wired Remote Controller PAR-32MAA (Requires MAC-333IF-E)
- Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- Thermostat Interface (PAC-US444CN-1)

DIMENSIONS: MFZ-KJ12NA-U1

MFZ-KJ12NA-U1

Unit: in.

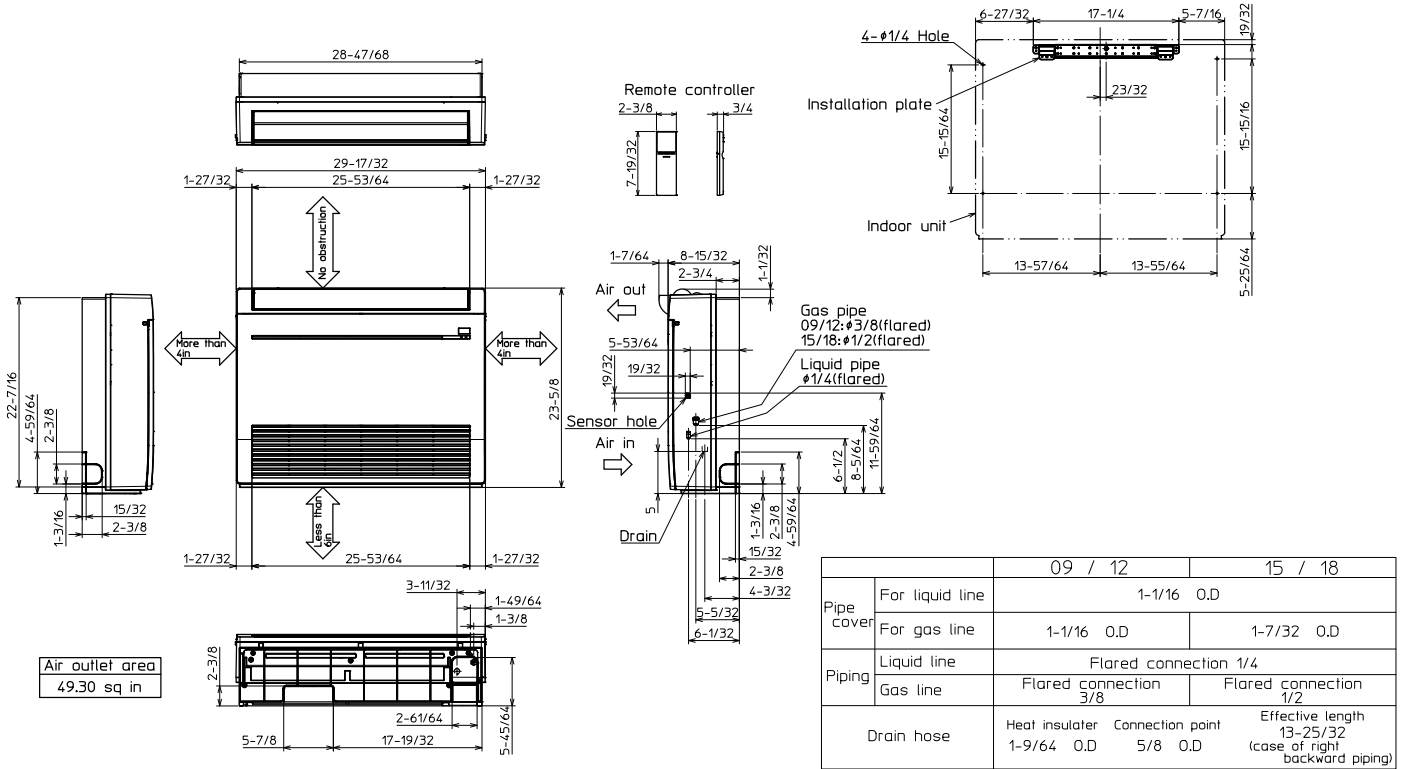

| | |
|-------------------|-------|
| Job Name: | |
| System Reference: | Date: |



Indoor Unit: MFZ-KJ18NA-U1



Wireless Remote Controller

SPECIFICATIONS:

| Rated Capacity* | | |
|-------------------------------|-----------|--------|
| Cooling ¹ | Btu/h / W | 17,000 |
| Heating at 47° F ² | Btu/h / W | 21,000 |

Rating Conditions per AHRI Standard:

¹ Cooling | Indoor: 80° F(27° C)DB / 67° F(19° C)WB ; Outdoor: 95° F(35° C)DB / 75° F(24° C)WB
² Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB ; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

| Electrical Power Requirements | 208 / 230V, 1-Phase, 60 Hz | |
|-------------------------------|----------------------------|--|
|-------------------------------|----------------------------|--|

| Minimum Circuit Ampacity (MCA) | A | 1 |
|--------------------------------|---|---|
|--------------------------------|---|---|

| Blower Motor (ECM) | F.L.A. | 0.72 |
|--------------------|--------|------|
|--------------------|--------|------|

| Blower Motor Output | W | 40 |
|---------------------|---|----|
|---------------------|---|----|

| Field Drainpipe Size O.D. | In.(mm) | 5/8 (15) |
|---------------------------|---------|----------|
|---------------------------|---------|----------|

Airflow Rate (Quiet - Lo - Med - Hi - Super Hi)

| Cooling | DRY | CFM | 198-237-282-328-374 |
|---------|-----|---------------------|---------------------|
| | WET | | 168-201-240-279-318 |
| Heating | DRY | 212-254-290-325-470 | |

Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)

| Cooling | dB(A) | 28-31-36-40-43 |
|---------|-------|----------------|
| | | Heating |

| Unit Dimensions (H x W x D) | In.(mm) | 23-5/8 x 29-17/32 x 8-15/32 (600 x 750 x 215) |
|-----------------------------|---------|---|
|-----------------------------|---------|---|

| Package Dimensions (H x W x D) | In.(mm) | 27-3/4 x 32-3/4 x 12 (693 x 816 x 275) |
|--------------------------------|---------|--|
|--------------------------------|---------|--|

Unit/Package Weight

| | | |
|---------|----------|-----------|
| Unit | Lbs.(kg) | 33 (15) |
| Package | Lbs.(kg) | 41 (18.5) |

| External Finish | Munsell 1.0Y 9.2 / 0.2 | |
|-----------------|------------------------|--|
|-----------------|------------------------|--|

Refrigerant Piping (Flared)

| | | |
|------------------------|---------|------------|
| Liquid (High Pressure) | In.(mm) | 1/4 (6.35) |
| Gas (Low Pressure) | | 1/2 (12.7) |

ACCESSORIES:

Indoor Unit

- Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- Condensate Pump (Sauermann SI30-115/230; 115/230V)
- Anti-Allergy Enzyme Filter (MAC-408FT-E)
- Platinum Catalyst Deodorizing Filter (MAC-308FT-E)
- Drain Pan Level Sensor (DPLS2)

Controls

- Wireless Controller (MHK1)
- Wired Remote Controller PAR-32MAA (Requires MAC-333IF-E)
- Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- Thermostat Interface (PAC-US444CN-1)

