

Job Name:

System Reference:

Date:

**MRCH2**



## MRCH2 REMOTE CONTROLLER SPECIFICATIONS

- Touch panel, Backlit, easy-to-read display
- Used RedLINK™ 3.0 wireless technology
  - Not compatible with MHK1, MOS1, and MCCH1 RedLINK 2.0 wireless technology environment.
- User functions allow user to set:
  - On/Off
  - Operation modes cool, heat, drying, fan
  - Set temperature (separate dual set points for heat and cool)
  - Fan speed setting
  - Airflow direction
- Set temperature range limits (dependent on the system connected):
  - Cooling from 50° to 99° F
  - Heating from 40° to 90° F
  - Auto from 50° to 90° F with dual temperature setting
- MHK2 Scheduling options:
  - No Schedule
  - MO-SU = Every day the same
  - MO-FR, SA, SU = 5-1-1 schedule
  - MO-FR, SA-SU = 5-2 schedule
  - Each Day = Every day individual
  - Allow kumo cloud to be schedule holder
- Hold function
- Temporary or Permanent schedule override
- Lockout:
  - On
  - Off
  - Mode
  - Fan Speed
  - Set point
  - Vane Direction
- Day/Time display with a 12 or 24-hour clock
- Supports both Fahrenheit and Celsius
- RedLINK™ Wireless Connection Status
- Filter sign display
- Diagnostics: Displays and records error codes
- Adjustable auto mode deadband

- Space temperature offset adjustment
- Space humidity offset adjustment
- Hide (on screen only)
  - Indoor temperature
  - Indoor humidity
- Temperature Sensing Source
  - MHK2
  - Indoor Unit
  - RedLINK Wireless Indoor Air Sensor (IAS)
  - Average of MHK2 and RedLINK Wireless Indoor Air Sensor (IAS)
- Indoor Humidity Source
  - MHK2
  - RedLINK Wireless Indoor Air Sensor (IAS)
  - Average of MHK2 and RedLINK Wireless Indoor Air Sensor (IAS)
- Improved indoor unit function code list
  - Indoor unit type
  - Expanded to 28 indoor unit codes
- Reset to factory default
- Uses two “AA” alkaline batteries (included)
- Dimensions: 4-5/64” x 4-5/64” x 1-1/16” (104 x 104 x 27 mm)
- Operating Ambient Temperature: 32° to 120° F (0° to 48.9° C)
- Operating Relative Humidity: 5% to 90%

## MIFH2 WIRELESS RECEIVER SPECIFICATIONS:

- Included in MHK2 Kit
- Mounts next to or near indoor units to allow MRCH2 Remote Controller operation
- Connects to indoor unit control board with MRC2 Cable
- Dimensions: 3-3/32” H x 1-3/4” W x 39/64” D (74.8 x 44.4 x 15.4 mm)
- Operating Ambient Temperature: -40° to 165° F (-40° to 73.9° C)
- Operating Relative Humidity: 5% to 95%

## MRC2 CABLE

- Included in MHK2 Kit in the MIFH2 box
- Connects MIFH2 Wireless Receiver to the CN105 connector on indoor unit control board
- Length: 39-23/64" (1 m)

# MODEL: MHK2 kumo touch™




## kumo cloud & MHK2

- kumo cloud and MHK2 can work together on the same indoor unit with the following devices:
  - Wireless Interface 2
    - PAC-USWHS002-WF-2
    - Wireless Interface 2 has an additional CN105 connector on it
  - MHK2 kit
- Compatibility with indoor units:
  - All CITY MULTI®
  - All P-Series
  - All M-series

## Accessories

- Wireless Interface 2 (PAC-USWHS002-WF-2)
- CN105 IT Extender (PAC-WHS01E-E)
- RedLINK 3.0 Wireless Indoor Air Sensor
- Not sold by Mitsubishi Electric Trane HVAC LLC
- Honeywell (C7189R2002-2/U)

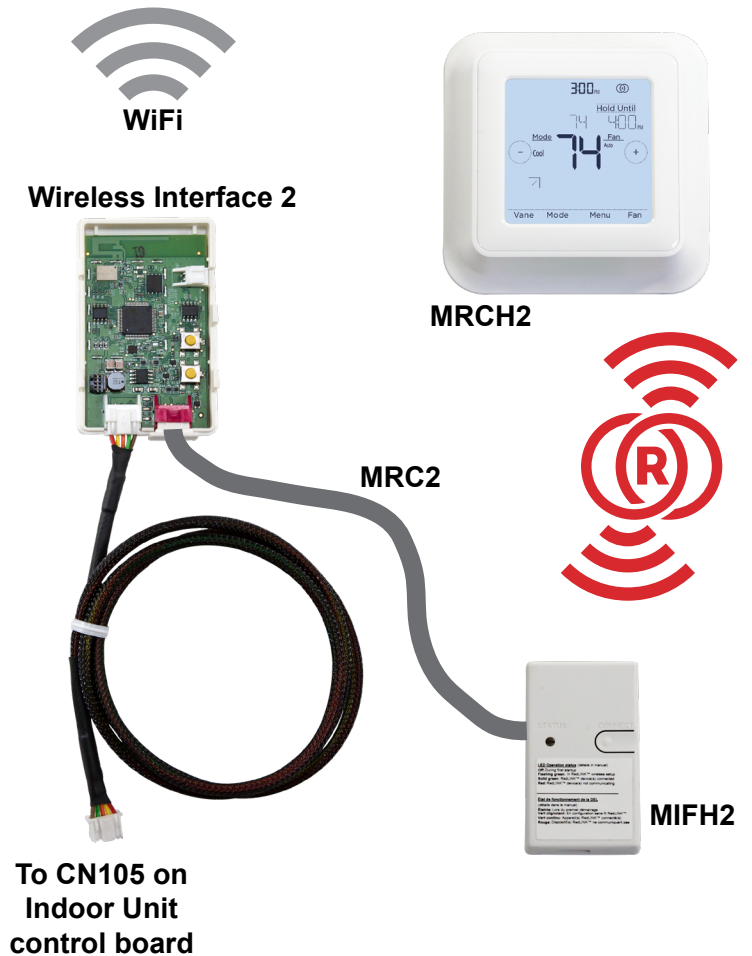

Specifications are subject to change without notice.  
 1340 Satellite Boulevard, Suwanee, GA 30024  
 Toll Free: 800-433-4822 www.mehvac.com  
 © 2020 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.  
 M\_Submittal\_MHK2 kumo touch 03-2020

# MXZ-4C36NA3 3-TON MULTI-ZONE INVERTER HEAT-PUMP SYSTEM



Job Name:

System Reference:

Date:



## FEATURES

- Variable speed INVERTER-driven compressor
- Optional base pan heater
- Quiet outdoor unit operation as low as 54 dB(A)
- High pressure protection
- Compressor thermal protection
- Compressor overcurrent detection
- Fan motor overheating/voltage protection



## SPECIFICATIONS: MXZ-4C36NA3

|                        |  |         |  |
|------------------------|--|---------|--|
| Indoor unit connection | Maximum Number of Connected IDU          |         | 4  |
|                        | Minimum Number of Connected IDU          |         | 2  |
|                        | Minimum connected capacity               | BTU/H   | 12,000                                     |
|                        | Maximum connected capacity               | BTU/H   | 42,000                                     |
| Piping                 | Liquid Pipe Size O.D. (Flared)           | In.[mm] | A,B,C,D: 1/4 [A,B,C,D: 6.35]               |
|                        | Gas Pipe Size O.D. (Flared)              | In.[mm] | A: 1/2; B,C,D: 3/8 [A: 12.72; B,C,D: 9.52] |
|                        | Total Piping Length                      | Ft. [m] | 230 [70]                                   |
|                        | Maximum Height Difference, ODU above IDU | Ft. [m] | 49 [15]                                    |
|                        | Maximum Height Difference, ODU below IDU | Ft. [m] | 49 [15]                                    |
|                        | Farthest Piping Length from ODU to IDU   | Ft. [m] | 82 [25]                                    |
|                        | Maximum Number of Bends for IDU          |         | 70   |

**NOTES:**

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

|  |    |                              |
|--|----|------------------------------|
| <sup>1</sup> Cooling (Indoor // Outdoor)         | °F | 80 DB, 67 WB // 95 DB, 75 WB |
| <sup>2</sup> Heating at 47°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // 47 DB, 43 WB |
| <sup>3</sup> Heating at 17°F (Indoor // Outdoor) | °F | 70 DB, 60 WB // 17 DB, 15 WB |

Conditions <sup>4</sup>Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

\*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

\*^ 5°F DB - 115°F DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance. Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

## OUTDOOR UNIT ACCESSORIES: MXZ-4C36NA3

|                         |  |               |
|-------------------------|--|---------------|
| Ball Valve              | Refrigeration Ball Valve - 1/2"  | BV12FFSI2     |
|                         | Refrigeration Ball Valve - 1/4"  | BV14FFSI2     |
|                         | Refrigeration Ball Valve - 3/8"  | BV38FFSI2     |
|                         | Refrigeration Ball Valve - 5/8"  | BV58FFSI2     |
| Control Wire            | M-Net Control Wire, 1,000' Roll (16-AWG, Standard, Twisted Pair, Shielded, Jacketed- Plenum rated) | CW162S-1000   |
|                         | M-Net Control Wire, 250' Roll (16-AWG, Standard, Twisted Pair, Shielded, Jacketed- Plenum rated)   | CW162S-250    |
| Drain Socket            | Drain Socket   | PAC-SG60DS-E  |
| Hail Guards             | Hail Guard   | HG-A9         |
| M-NET Converter         | M-NET Converter  | PAC-IF01MNT-E |
| Mini-Split Wire         | 14 Gauge, 4 wire MiniSplit Cable—250 ft. roll  | S144-250      |
|                         | 14 Gauge, 4 wire MiniSplit Cable—250 ft. roll  | SW144-250     |
|                         | 14 Gauge, 4 wire MiniSplit Cable—50 ft. roll   | S144-50       |
|                         | 14 Gauge, 4 wire MiniSplit Cable—50 ft. roll   | SW144-50      |
|                         | 16 Gauge, 4 wire MiniSplit Cable—250 ft. roll  | S164-250      |
|                         | 16 Gauge, 4 wire MiniSplit Cable—250 ft. roll  | SW164-250     |
|                         | 16 Gauge, 4 wire MiniSplit Cable—50 ft. roll   | S164-50       |
|                         | 16 Gauge, 4 wire MiniSplit Cable—50 ft. roll   | SW164-50      |
| Mounting Pad            | Condensing Unit Mounting Pad: 16" x 36" x 3"   | ULTRILITE1    |
|                         | Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic   | DSD-400P      |
| Optional Defrost Heater | Optional Defrost Heater  | PAC-645BH-E   |
| Port Adapter            | Adaptor: 1/2" x 3/8"   | MAC-A455JP-E  |
|                         | Adaptor: 1/2" x 5/8"   | MAC-A456JP-E  |
|                         | Adaptor: 3/8" x 1/2"   | MAC-A454JP-E  |
|                         | Adaptor: 3/8" x 5/8"   | PAC-SG76RJ-E  |
| Stand                   | 18" Single Fan Stand   | QSMS1801M     |
|                         | 24" Single Fan Stand   | QSMS2401M     |
|                         | Condenser Wall Bracket   | QSWB2000M-1   |
|                         | Condenser Wall Bracket - Stainless Steel Finish  | QSWBSS        |
|                         | Outdoor Unit Stand — 12" High  | QSMS1201M     |








# SEZ-KD18NA4\*\* INDOOR FAN PERFORMANCE AND CORRECTED AIR FLOW CHARTS


## SEZ-KD18NA4

(External static pressure 0.02[in.WG](5Pa)) 208/230V 60Hz

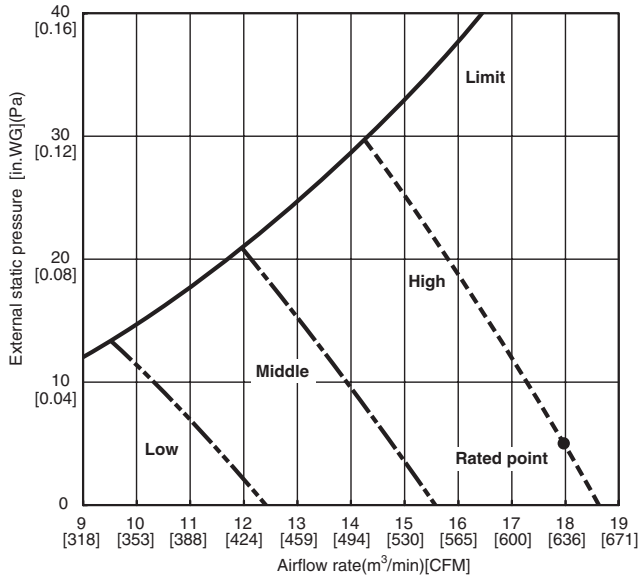


## SEZ-KD18NA4

(External static pressure 0.06[in.WG](15Pa)) 208/230V 60Hz

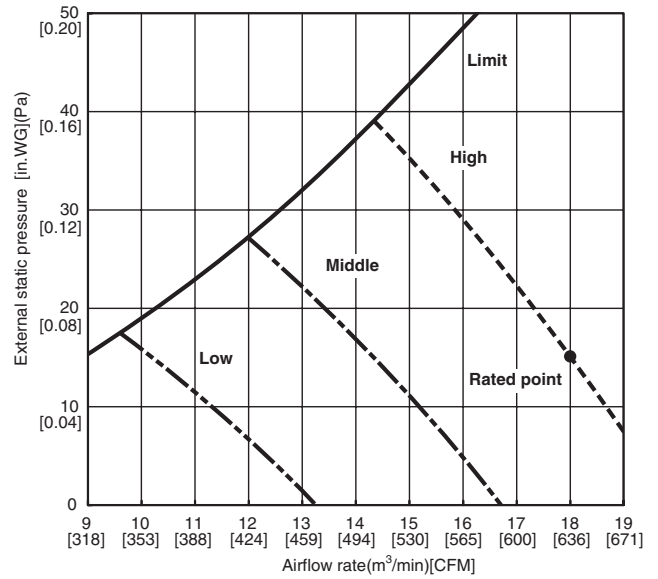


## SEZ-KD18NA4

(External static pressure 0.14[in.WG](35Pa)) 208/230V 60Hz

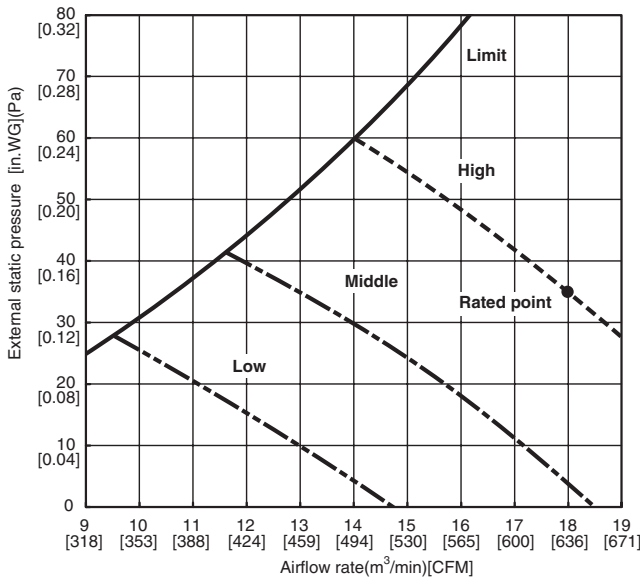


## SEZ-KD18NA4

(External static pressure 0.20[in.WG](50Pa)) 208/230V 60Hz

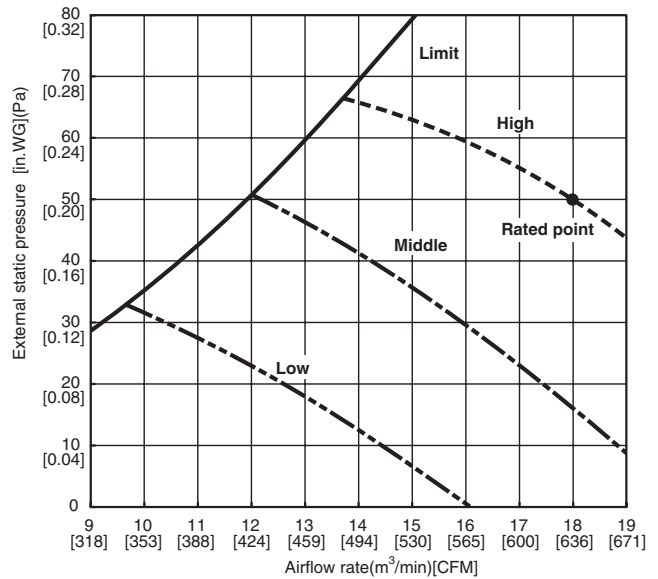

# DIMENSIONS: SEZ-KD18NA4\*\*

Unit : mm(in.)

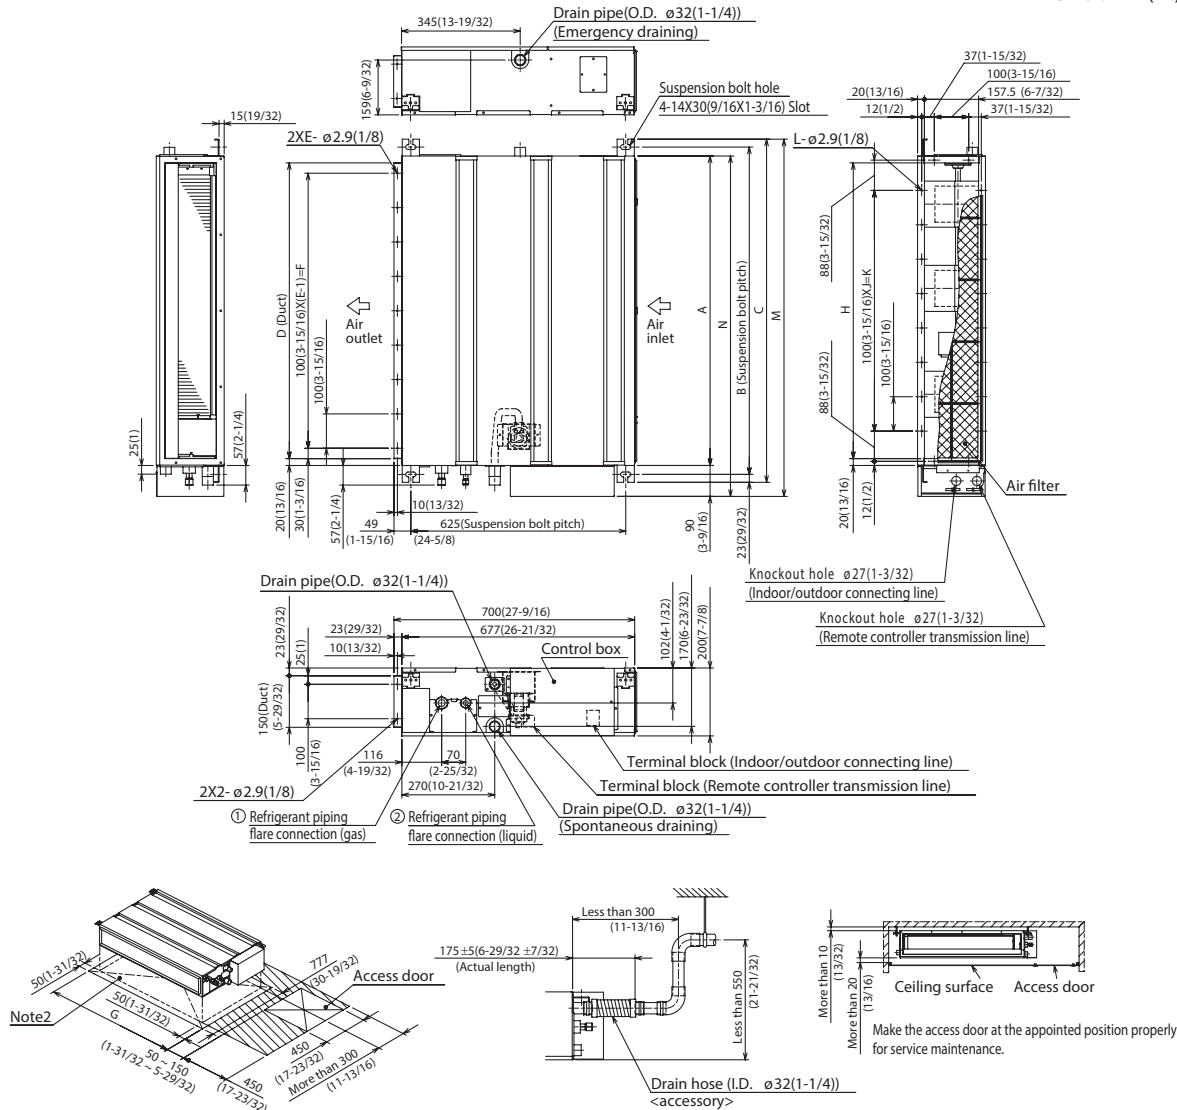

Required space for service and maintenance

| Model         | mm(in.)           |                  |                   |                  |    |                  |                  |                  |   |                   |    |                    |                  |                  | mm(in.)          |  |
|---------------|-------------------|------------------|-------------------|------------------|----|------------------|------------------|------------------|---|-------------------|----|--------------------|------------------|------------------|------------------|--|
|               | A                 | B                | C                 | D                | E  | F                | G                | H                | J | K                 | L  | M                  | N                | ① Gas pipe       | ② Liquid pipe    |  |
| SEZ-KD09NA4** | 700<br>(27-9/16)  | 752<br>(29-5/8)  | 798<br>(31-7/16)  | 660<br>(26)      | 7  | 600<br>(23-5/8)  | 800<br>(31-1/2)  | 660<br>(26)      | 5 | 500<br>(19-11/16) | 16 | 839<br>(33-1/16)   | 790<br>(31-1/8)  | $\phi 9.52(3/8)$ | $\phi 6.35(1/4)$ |  |
| SEZ-KD12NA4** | 900<br>(35-7/16)  | 952<br>(37-1/2)  | 998<br>(39-5/16)  | 860<br>(33-7/8)  | 9  | 800<br>(31-1/2)  | 1000<br>(39-3/8) | 860<br>(33-7/8)  | 7 | 700<br>(27-9/16)  | 20 | 1039<br>(40-29/32) | 990<br>(39)      | $\phi 12.7(1/2)$ | $\phi 6.35(1/4)$ |  |
| SEZ-KD15NA4** | 1100<br>(43-5/16) | 1152<br>(45-3/8) | 1198<br>(47-3/16) | 1060<br>(41-3/4) | 11 | 1000<br>(39-3/8) | 1200<br>(47-1/4) | 1060<br>(41-3/4) | 9 | 900<br>(35-7/16)  | 24 | 1239<br>(48-25/32) | 1190<br>(46-7/8) | $\phi 12.7(1/2)$ | $\phi 6.35(1/4)$ |  |

- Note1. Use M10 screw for the suspension bolt (field supply).  
 2. Keep the service space for the maintenance at the bottom.  
 3. This chart indicates for SEZ-KD15NA4\*\* model, which has 3 fans.  
 SEZ-KD09, 12NA4\*\* models have 2 fans.  
 SEZ-KD18NA4\*\* models have 4 fans.  
 4. In case an inlet duct is used, remove the air filter (supply with the unit), then install the filter (field supply) at suction side.



COOLING & HEATING

1340 Satellite Boulevard  
 Suwanee, GA 30024  
 Toll Free: 800-433-4822  
 www.mehvac.com