

H384816 TABITHA PENDANT

ASSEMBLY AND MOUNTING INSTRUCTIONS

GENERAL

- WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOUILD BE COMPLETED BY A LICESNSED ELECTRICAN
- FAILURE TO INSTALL FIXTURE CORRECTLY COUD RESULT IN SEROIUS INJURY OR DEATH
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.

- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

INSTALLATION

STEP 1.	Thread the wire through stems and twist tightly onto body. Keep adding additional stems required.		sure there are no exposed wires or strands that could cause a dangerous short circuit.
STEP 2.	Slide in the canopy to the stem. And thread the swivel into the top end of the stem set.		FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SEROIUS INJURY OR
STEP 3.	Pull the wires out from the outlet box and install mounting		DEATH!
	plate onto the outlet box using the (2) mounting screws.	STEP 8.	Carefully place connections back into the outlet box.
	Strip the fixture wires ½" long at the ends.	STEP 9.	Attach the canopy to the mounting plate and secure it with
STEP 4.	Trim excess wire to min 6" beyond stem, strip to 5/8".		mounting nuts.
STEP 5.	Fasten bare ground wire to ground wire from the wall outlet box (usually green or copper color) or connect ground wire	STEP 10.	Attach the small glass shades and large glass shades onto the fixture.
	to green screw on the mounting plate.	STEP 11.	Install the lamp(s). The fixture is rated for 20-watt type G9
STEP 6.	Connect the neutral (white) fixture wire coming from the		xenon lamp.
	fixture base to neutral (usually white) outlet wire. Fasten		DO NOT EXCEED RECOMMENDED WATTAGE!
	both wires together with a plastic wire nut and tightly wrap	STEP 12.	Restore power to the circuit at breaker or fuse-box.

DIMMING

STEP 7.

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

the wire nut with electrical tape.

provided by your local electrical distributor, home center, or hardware store.

CLEANING


Please clean with a soft, dry cloth ONLY! Do not use cleaning products.

Repeat the previous step with the hot (black wires). Make



H384816 TABITHA PENDANT

ASSEMBLYANDMOUNTINGDIAGRAM

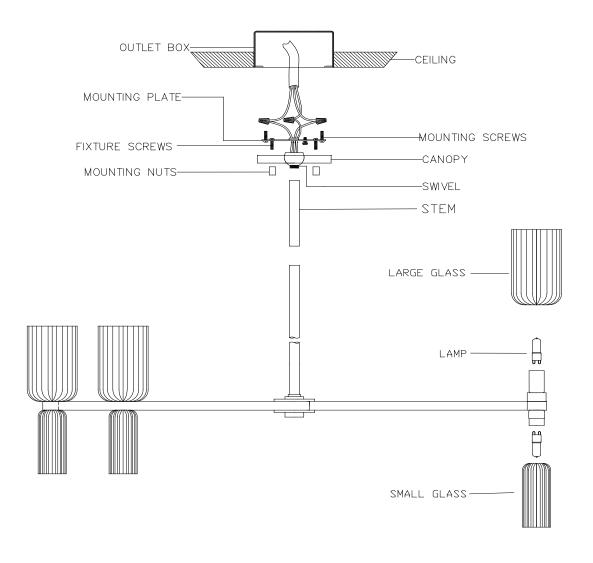

WIRE NUT/TAPINGDIAGRAM

