


Plum > Configure item number from attributes below.

Finis	h Bla	ide Span Blac	de Color L	Light Option	Control Option
#PLU -	-	-	-	-	
	Gloss White 52 Brushed Aluminum	52" Span WH	White	271 17W LED	 Tan Speed Only Fan & Light – 3 Wire Handheld Remote Fan & Light – 2 Wire Wall/Remote Combo

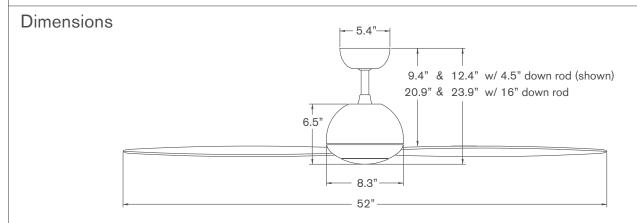

Specifications

- 153mm x 18mm AC motor with reverse switch on fan body
- Die cast aluminum construction
- 52" span, plywood blades
- Includes 4.5" and 16" down rods (longer options also available)
- Optional LED light: 17W, 90 CRI, 3000K, 1530 lumens (dimmable) behind an opal glass diffuser; adds 1.5" to length of fan; CA Title 24, JA8-2019 compliant
- Slope compatible up to 33°; adapter available for slopes up to 45°
- Designed by Ron Rezek
- ETL listed for dry and damp locations
- Weight: 14 lbs (6.4 kgs)

Performance Data

LOWEST SPEED

RPM: 90 CFM: 1,505 Watts: 10.92 CFM/W: 138

HIGHEST SPEED

RPM: 250 CFM: 4,508 Watts: 66.19 CFM/W: 68

Energy Guide Data

Average Energy Use 41 Watts

> Average Airflow 3,101 CFM

Yearly Energy Cost \$11

Average Efficiency 75 CFM/Watt

Energy Guide Data represents weighted averages of low speed and high speed performance, assuming typical use (excluding light). For more information, visit www.modernfan.com.

Plum



FAN FINISHES



PLYWOOD BLADES

Plywood blades are constructed of furniture grade veneers, painted or stained as shown here. Natural variations may exist in woodgrains and finishes.



PLUM FAN CONTROLS

Selection of a control option is made at time of order and incorporated into the fan item number (except #FC-009A and #FC-009B which are sold as accessory items).



#FC-001 Fan Speed Only Control(no light)

For a single AC fan, providing four speeds. Not intended for a fan with light.



#FC-003-LED Handheld Remote RF Control

Includes RF handset and receiver for a single AC fan or AC fan with LED light, providing three speeds and selectable light function (on/off or dimming). Includes universal or dedicated channel selection.



#FC-005-LED Wall/Remote RF Control

Includes RF handset, RF wall control and receiver for a single AC fan or AC fan with LED light, providing three speeds and selectable light function (on/off or dimming). Includes universal or dedicated channel selection and master power switch.



Fan & Light Control—3 Wire

For a single AC fan with LED light, providing four speeds and dimming function. Requires three wires from switch location to fan.



#FC-004-LED RF Fan & Light Control— 2 Wire

Includes RF wall control and receiver for a single AC fan or AC fan with LED light, providing three speeds and selectable light function (on/off or dimming). Includes universal or dedicated channel selection and master power switch.



#FC-009A / #FC-009B Multi-fan Speed Controls for AC Fans

(no lights)
Sold as an accessory item,
providing three speeds for multiple
fans on a single switch leg.
FC-009A for 2-3 fans
FC-009B for 3-6 fans

Note: Control of fan lights must be accounted for separately with owner provided control on separate switch leg.

DOWN RODS

The Plum ships standard with 4.5" and 16" down rods. Use the following part numbers to order accessory down rods.

	Finis	Length		
#DRD	-		-	
	•		•	
	GW	Gloss White	12	12"
	ВА	Brushed Aluminum	24	24"
			36	36"
			48	48"
			60	60"
			72	72"

SLOPE ADAPTER

The Plum will accommodate ceiling slopes up to 33 degrees. The #045 slope adapter can accommodate slopes exceeding 33 degrees and up to 45 degrees.

Finish

#045

▲ SW Glo

GW Gloss White

BA Brushed Aluminum