


# WINDFLOWER

FR-W1815-60L

60" Ceiling Fan

# MODERN FORMS SMART FANS

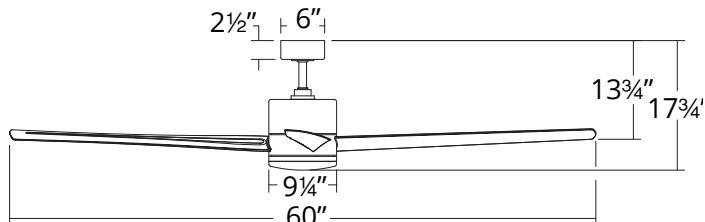

## PRODUCT DESCRIPTION

As bold and beautiful as a classic Holland windmill, this contemporary twelve-blade design is perfect for mid-sized and larger spaces with its 60 inch or 80 inch blade sweeps. Control everything from the palm of your hand with our Wi-Fi-connected Modern Forms app- no one else in the industry can match this combination of style and intuitive technology. Available in three sleek finishes, Windflower makes life easier and more beautiful every day.

## FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Optional LED light kit included
- Includes RF wall control
- Optional remote control sold separately
- Compatible with Modern Forms app

## AIRFLOW/ENERGY EFFICIENCY

**Weighted-Average/High Airflow CFM:** 2798/8840

**Weighted-Average/High Energy Use (W):** 13/49

**Estimated Yearly Energy Cost (\$):** 4

**Weighted-Average/High Efficiency (CFM/W):** 211/180

**Max RPM:** 128

## SPECIFICATIONS

**Construction:** Aluminum, ABS

**Blade:** 12° Pitch, 60" sweep

**Downrod:** .75"W x 6"H included

**Mounting Slope:** Up to 30°

**Wire:** 80"

**Hanging Weight:** 34.5 lbs

**Total Power:** 72.5W

**Standards:** UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20

**Motor Type:** 168 x 30 sensorless DC motor

## WIRELESS PERFORMANCE

**Remote Pairing Distance:** Up to 30 ft from fan

**Wi-Fi Range:** Up to 150 ft\*

## LUMINAIRE PERFORMANCE

**Light Source:** LED

**Light Wattage:** 23.5W

**Lumens/Delivered Lumens:** 2100/1080

**Dimming:** Integrated

**CRI:** 90

**Color Temperature:** 3000K (2700K/3500K options available)

**Rated Life:** 50,000 hours

## ORDER NUMBER

| Model        | Housing   | Blade  |
|--------------|---|--|
| FR-W1815-60L | <b>OB</b><br>Oil Rubbed Bronze<br><b>GH</b><br>Graphite<br><b>MB</b><br>Matte Black | <b>DW</b><br>Dark Walnut<br><b>WG</b><br>Weathered Gray<br><b>DK</b><br>Distressed Koa |

Example: **FR-W1815-60L-MB/DK**

For 2700K add "-27" ; for 3500K add "-35" before the finish: **FR-W1815-60L27MBDK**

**\*Results may vary based on application and surroundings.**

**\*This fan comes uni-pack - blade select options are not available**

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# WINDFLOWER

FR-W1815-60L

60" Ceiling Fan

MODERN FORMS  
SMART FANS

## OPTIONAL ACCESSORIES

|                          |   |   |                 |  |
|--------------------------|---|---|-----------------|--|
| Bluetooth Wall Control   |    | <b>F-WCBT</b>   | <b>WT</b> White | Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.          |
| Bluetooth Remote Control |    | <b>F-RCBT</b>   | <b>WT</b> White | Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries. |
| Downrod                  |    | <b>XF-12</b> 12IN<br><b>XF-18</b> 18IN<br><b>XF-24</b> 24IN<br><b>XF-36</b> 36IN<br><b>XF-48</b> 48IN<br><b>XF-60</b> 60IN<br><b>XF-72</b> 72IN |                 | All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.                                     |
| Downrod Couplers         |  | <b>XF-I</b>   |                 | Connects two downrods together.  |
| Sloped Ceiling Kit       |  | <b>XF-SCK</b>   |                 | Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.   |

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BN**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

## SUGGESTED DOWNRod HEIGHT USAGE

| Ceiling Height | 15' | 14' | 13' | 12' | 11' | 10' | 9'  |
|----------------|-----|-----|-----|-----|-----|-----|-----|
| Downrod        | 72" | 60" | 48" | 36" | 24" | 18" | 12" |

## SLOPED CEILING DEGREE CONVERSION CHART

| Degree        | 4-8°  | 9-13° | 14-17° | 18-21° | 22-25° | 26-29° | 30-32° | 33-35° | 36-38° | 39-41° | 42-44° | 45°   |
|---------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
| Ceiling Slope | 1/12  | 2/12  | 3/12   | 4/12   | 5/12   | 6/12   | 7/12   | 8/12   | 9/12   | 10/12  | 11/12  | 12/12 |
| Pitch         | pitch | pitch | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch |

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire