



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Maglev

WS-W24110

**PRODUCT DESCRIPTION**


An ultra-functional balanced sconce. This LED wall luminaire employs an etched glass diffuser that delivers interest-generating bidirectional illumination.

**FEATURES**

- ACLED driverless technology
- Up and down illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant, ADA
<b>Input</b>	120 VAC, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-10%
<b>Mounting</b>	Can be mounted on wall in all orientations
<b>Color Temp</b>	4000K, 3500K, 3000K
<b>CRI</b>	90
<b>Construction</b>	Extruded aluminum body with etched glass diffuser

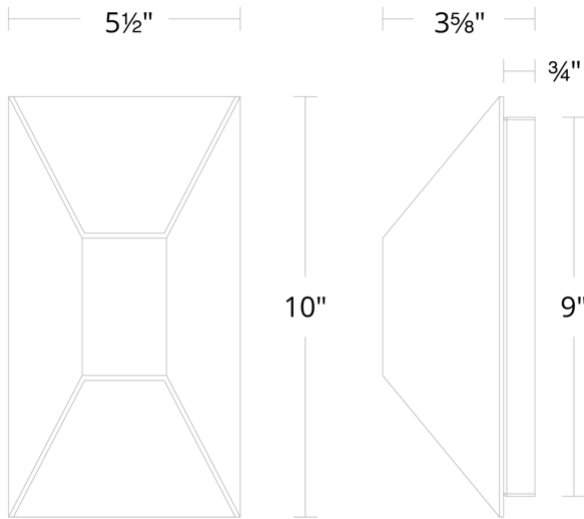

WS-W24110

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W24110 10"	3000K	AL Brushed Aluminum	15.3W	632	472
	3000K	BK Black	15.3W	632	472
	3000K	BZ Bronze	15.3W	632	472
	3000K	WT White	15.3W	632	472
	3500K	AL Brushed Aluminum	15.3W	710	472
	3500K	BK Black	15.3W	710	472
	3500K	BZ Bronze	15.3W	710	472
	3500K	WT White	15.3W	710	472
	4000K	AL Brushed Aluminum	15.3W	641	472
	4000K	BK Black	15.3W	641	472
	4000K	BZ Bronze	15.3W	641	472
	4000K	WT White	15.3W	641	472

Example: **WS-W24110-40-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Maglev

WS-W24116

**PRODUCT DESCRIPTION**


An ultra-functional balanced sconce. This LED wall luminaire employs an etched glass diffuser that delivers interest-generating bidirectional illumination.

**FEATURES**

- ACLED driverless technology
- Up and down illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant, ADA
<b>Input</b>	120 VAC, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-10%
<b>Mounting</b>	Can be mounted on wall in all orientations
<b>Color Temp</b>	3000K, 3500K, 4000K
<b>CRI</b>	90
<b>Construction</b>	Extruded aluminum body with etched glass diffuser

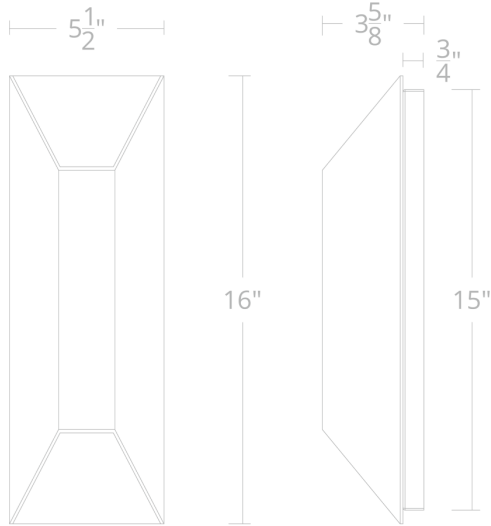

WS-W24116

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W24116 16"	3000K	AL Brushed Aluminum	25.4W	1000	802
	3000K	BK Black	25.4W	1000	802
	3000K	BZ Bronze	25.4W	1000	802
	3000K	WT White	25.4W	1000	802
	3500K	AL Brushed Aluminum	25.4W	1000	866
	3500K	BK Black	25.4W	1000	866
	3500K	BZ Bronze	25.4W	1000	866
	3500K	WT White	25.4W	1000	866
	4000K	AL Brushed Aluminum	25.4W	1000	836
	4000K	BK Black	25.4W	1000	836
	4000K	BZ Bronze	25.4W	1000	836
	4000K	WT White	25.4W	1000	836

Example: **WS-W24116-40-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)