


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Skein

WS-3527

PRODUCT DESCRIPTION

The Skein bath vanity light is an elongated bar of V-cut seedy crystal, casting intricate striations of 3000K LED light. Mount either vertically or horizontally to suit your space.

FEATURES


- ACLED driverless technology
- V-cut K5 seedy crystal
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal diffuser

REPLACEMENT PARTS

RPL-GLA-3527 - Replacement Glass

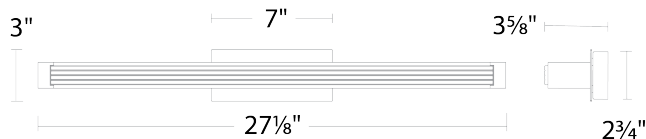

WS-3527

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-3527 27"	3000K	AB Aged Brass	17.4W	1310	1001
	3000K	BN Brushed Nickel	17.4W	1310	1001

Example: **WS-3527-BN**

For custom requests please contact customs@modernforms.com




Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Skein

WS-3533

PRODUCT DESCRIPTION

The Skein bath vanity light is an elongated bar of V-cut seedy crystal, casting intricate striations of 3000K LED light. Mount either vertically or horizontally to suit your space.

FEATURES


- ACLED driverless technology
- V-cut K5 seedy crystal
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal diffuser

REPLACEMENT PARTS

RPL-GLA-3534 - Replacement Glass

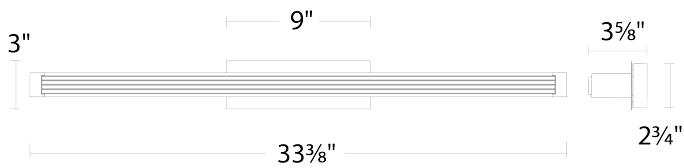

WS-3533

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-3533 33"	3000K 3000K	AB Aged Brass BN Brushed Nickel	23.4W 23.4W	1799 1799	1260 1260

Example: **WS-3533-BN**

For custom requests please contact customs@modernforms.com