


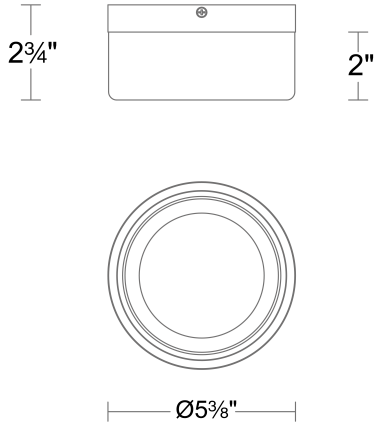

FMW256605

Project:

Location:

Fixture Type:

Catalog Number:

#### AVAILABLE FINISHES:



## Tuck II

FMW256605

#### PRODUCT DESCRIPTION

Minimal Form. Maximum Versatility. The Tuck II Outdoor LED Flush Mount proves that simplicity and sophistication can coexist beautifully. Defined by its clean circular profile and diffuser featuring a banded ring design, Tuck II emits a soft, even glow that enhances exterior spaces with ambient illumination. Engineered for durability, this versatile fixture is wet rated for outdoor use making it ideal for everything from patios and porches. Compact yet powerful, Tuck is equipped with 4CCT selectable color temperature, giving you the flexibility to fine-tune the light for every setting, from warm, relaxing ambiance to bright, functional illumination. Its minimalist design blends effortlessly with modern architecture while providing reliable, high-performance lighting that's built to last. Available in a heat resistant option for sauna application, making it ideal for everything from patios and porches to wellness spaces and spa environments.

#### FEATURES

- ACLED driverless technology
- Die-cast aluminum frame
- Lightweight dimensional injection-molded PC shade with a clear exterior juxtaposed with an etched interior
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K (Available for standard FMW256605 version)
- Option available for sauna application. Durable and heat resistant. Offered in 3000K only (special order)
- For Sauna option, add "S" after the model (Example: FMW256605S)

#### SPECIFICATIONS

|              |                                                              |
|--------------|--------------------------------------------------------------|
| Rated Life   | 54000 Hours                                                  |
| Standards    | ETL, cETL, Wet Location Listed, Title 24 JA8: 2025 Compliant |
| Input        | 120 VAC, 50/60Hz                                             |
| Dimming      | ELV: 100-5%, TRIAC: 100-10%                                  |
| Mounting     | Can be mounted on ceiling or wall in all orientations        |
| Color Temp   | 2700K/3000K/3500K/4000K                                      |
| CRI          | 90                                                           |
| Construction | Die-cast aluminum frame with injection molded PC shade       |

| Model & Size | Color Temp              | Finish   | LED Watts | LED Lumens | Delivered Lumens |
|--------------|-------------------------|----------|-----------|------------|------------------|
| FMW256605 5" | 2700K/3000K/3500K/4000K | BK Black | 13.2W     | 1125       | 616              |
|              | 2700K/3000K/3500K/4000K | WT White | 13.2W     | 1125       | 616              |

Example: **FMW256605-WT**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)