# **MOEN**®

## **Specifications**

#### DESCRIPTION

- One piece chrome plated cast brass construction above-deck
- Transitional Style matches M•Power™ lavs (models - CA8301, CA8302, 8553, 8553AC, 8554, 8554AC)
- · Single mount
- Easily refillable 1500mL foam soap reservoir included
- Works with all commercial, non-pumice foam soaps (purchased separately)
- Vandal resistant below-deck box with included mounting hardware
- Do not install or operate at temperatures below 32°F (0°C)

### **OPERATION**

- "Touch free" operation for improved hygiene
- · Adjustable sensor activation distance
- One ~1mL dispense per activation
- Maintenance/Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- · Low battery, low soap, and service indicator LED's
- (4) D batteries (included) with AC compatibility
- For AC connection: Transformer 104630 required for up to 8 devices, and 182538 connector for each device
- Battery life: 1 year or 50,000 cycles

#### **STANDARDS**

- Meets the current requirements of the Buy American Act (BAA)
- ADA 🕭 compliant
- Third party certified to meet FCC part 15

### **WARRANTY**

• Warranted for 5 years against material or manufacturer defects

### NOTES

Rev. 11/18

- Caution: Do not kink Soap Tube
- Ensure Pump Assembly is centered under Spout
- Soap may take up to approximately 20 dispense cycles to switch from liquid to foam form after installation.
- Soap dispenser may not operate with sinks that protrude above the deck mounting surface. Consult the Exploded Parts View for spacers that may be used in some of these installations.



M•Power™ Transitional Style Electronic Soap Dispenser

**Models**: 8558

**NOTE**: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1" MIN. DIA.



Refer to back for dimensions


FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

# **MOEN**<sup>®</sup>

## **Specifications**

There is more than one version of this model. Page down to identify the version you have.

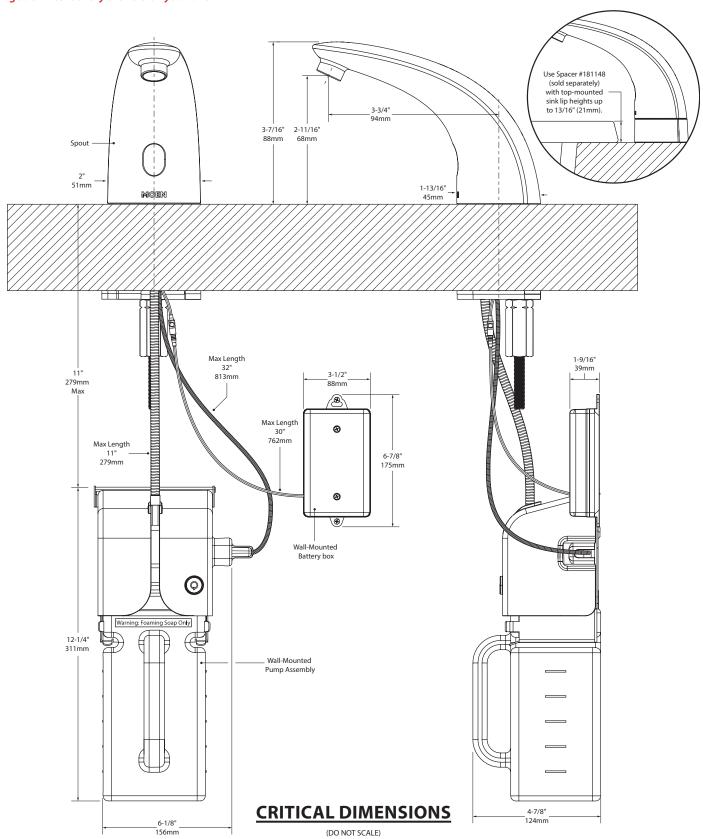

# **MOEN**<sup>®</sup>

## **Specifications**

