MOEN[®]

DESCRIPTION

- · Versatile, touchless convenience
- Allows users to control the faucet in 2 unique ways: touchless Wave Sensor and familiar handle
- Powered by 6 AA batteries (included) or optional AC adapter with power splitter
- Metal construction with various finishes identified by suffix
- Flexible supply lines with 3/8" compression fittings
- · Includes metal spring loaded pop up drain assembly
- · Includes optional 3- hole deck plate (escutcheon)
- Quick installation using Duralock connections

OPERATION

- · Lever style handle, installed on right hand side only
- Temperature controlled by 100° arc of handle travel
- · Operates with less than 5 lbs. of force

FLOW

• Flow is limited to 1.2 gpm max (4.5l/min) at 60 psi

CARTRIDGE

 1255™ Duralast™ cartridge for Single-Handle Faucets Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to WaterSense® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- · Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- · ADA for lever handle

WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations
- Visit www.moen.com/support for complete details and limitations

Specifications



DOUX™ MotionSense Wave™

Single Handle Digital Lavatoy Faucet with MotionSense Wave™

MODELS: S6910EW series

This Faucet is designed to be installed in 1 or 3 holes, 1-1/4" (32mm) min. dia.






See page 2 for dimensions

CRITICAL DIMENSIONS DO NOT SCALE

MOEN[®]

Specifications

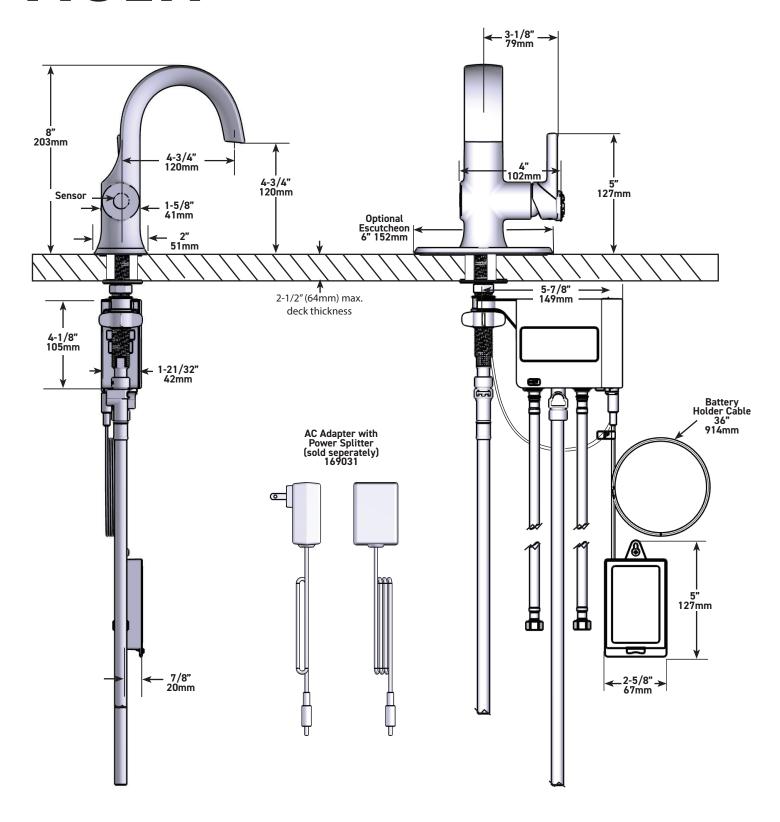

CRITICAL DIMENSIONS DO NOT SCALE