## **MOEN**<sup>®</sup>

#### **DESCRIPTION**

- · Metal construction with various finishes identified by suffix
- Compatible with M•pact<sup>™</sup> valve system

#### **OPERATION**

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Rotate hot side handle counterclockwise to open (clockwise to close)
- Rotate cold side handle clockwise to open and (counterclockwise to close)

#### **FLOW**


- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings.
- 1.2gpm max (4.5L/min)

#### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- ADA for lever handles
- Certified to NSF 61/9 + 372

#### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

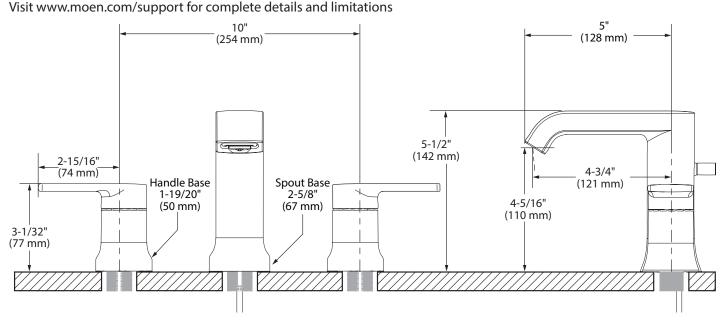




### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

## **Specifications**



# GENTA™ Two-Handle Widespread Lavatory Faucet Trim Models: T6708 series

Valves: 9000, 69000



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

#### **DESCRIPTION**

- Duralock™ quick connect system
- Brass construction
- 1/2" IPS connections
- · Includes pop-up waste assembly

#### **OPERATION**

- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

#### CARTRIDGE

1234 cartridge design with nonmetallic and stainless steel materials

#### **STANDARDS**


#### When Trim Kit is added to M•Pact valve, the product is:

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

#### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

## Specifications




M•PACT VALVE
Widespread Lavatory Rough-in Valve

Models: 9000, 69000 (69000-Bulk Packed 6 per carton)

**NOTE:** FOR DECK THICKNESS 1-1/2" to 3", USE SERVICE KIT #175709. VALVES INSTALL THROUGH 1-1/4" DIA. HOLE.

NOTE: SPOUT INSTALLS THROUGH 1-1/8" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE.

**NOTE:** MAXIMUM HOLE DIA. 1-1/2"

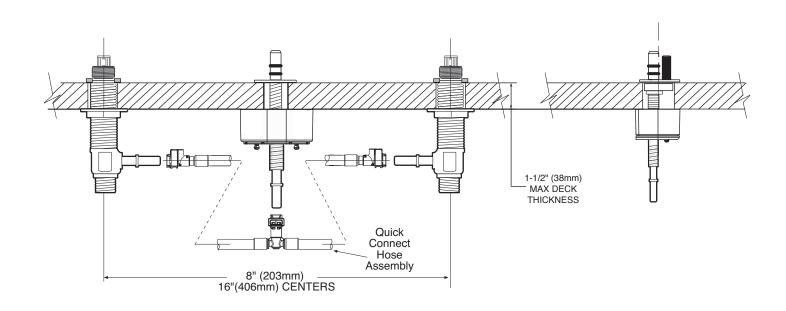

#### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



- · Quick connect system
- Brass construction

**DESCRIPTION** 

- 1/2" IPS connections
- · Includes pop-up waste assembly

#### **OPERATION**

- Hot side counterclockwise to open (clockwise to close)
- · Cold side clockwise to open (counterclockwise to close)

#### CARTRIDGE

1224 cartridge design with nonmetallic and stainless steel materials

#### **STANDARDS**


When Trim Kit is added to M•Pact valve, the product is:

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

## Specifications




M•PACT VALVE
Widespread Lavatory Rough-in Valve

**Models:** 9000, 69000 **(69000-Bulk Packed 6 per carton)** 

**NOTE:** FOR DECK THICKNESS 1-1/2" to 3", USE SERVICE KIT #175709. VALVES INSTALL THROUGH 1-1/4" DIA. HOLE.

**NOTE:** SPOUT INSTALLS THROUGH 1-1/8" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE.

**NOTE:** MAXIMUM HOLE DIA. 1-1/2"

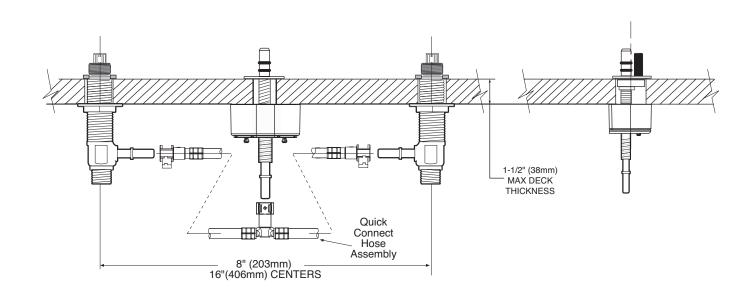

#### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com