

## DESCRIPTION

- 1/4" and 3/8" push to connect fitting connections
- Carbon block and reverse osmosis filter technology
- Compatible with F7600, F7620, F7660 beverage faucets and F87627, F5923, F9126, FS7235, FS72003, FS73004 series pulldown faucets (Sold Separately)
- Air gap 105895 series and adapter kit 262579 required if used with pulldown faucets

## OPERATION


- Pressure: 40–100 psi [276–689 kPA]
- Temperature: 40–100 °F [4–38 °C]
- Flow: 0.5 gpm
- Daily Production Rate: 27.5 gal/day
- 3.2 gallon tank

## STANDARDS

- Third Party Certified to ANSI/NSF 42, 53, 58, 372, 401 and NSF Protocol 231 for the specific performance claims enumerated on the performance data sheet for the respective filters.
- Third Party Certified to CSA B483.1

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

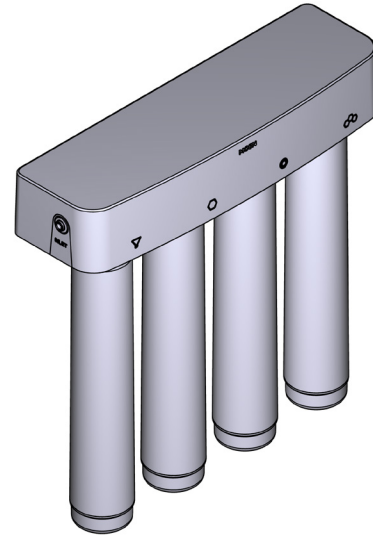

**Moen®**

**4 Stage Reverse Osmosis  
Water Filtration System**

**MODELS:** F9900

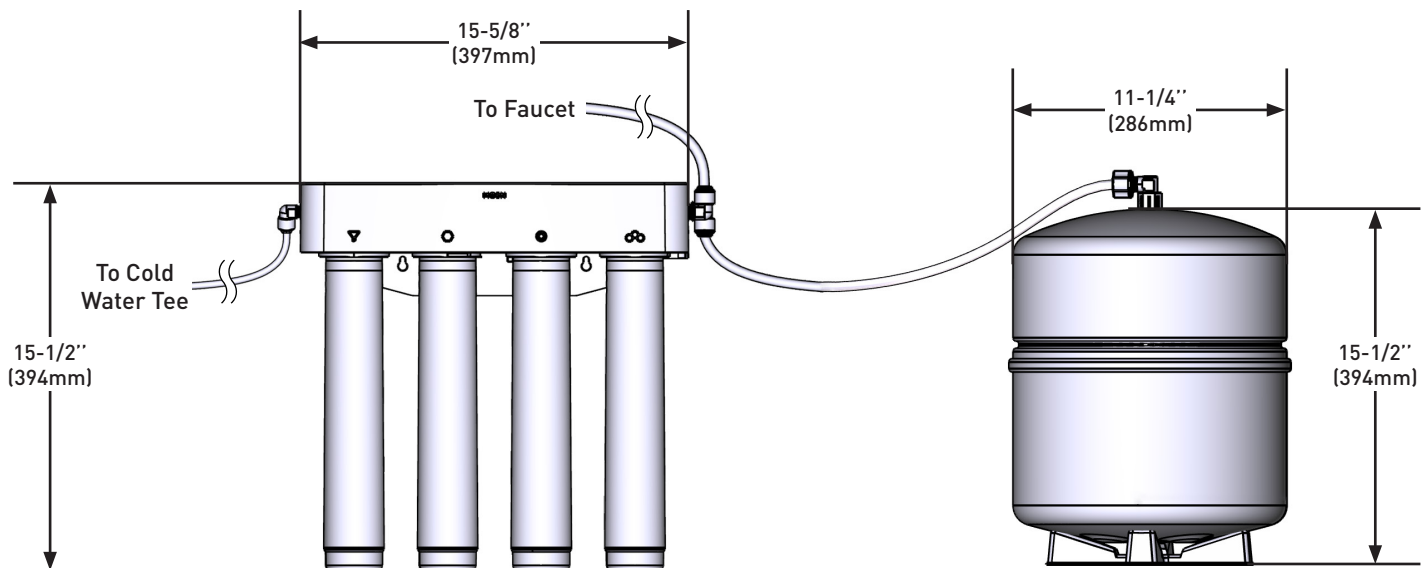

**CRITICAL DIMENSIONS** DO NOT SCALE